

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

7442

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)

09/913869

INTERNATIONAL APPLICATION NO.  
PCT/US00/04185INTERNATIONAL FILING DATE  
18 February 2000PRIORITY DATE CLAIMED  
22 February 1999

## TITLE OF INVENTION

Cleaning Compositions Containing Selected Nonionic Surfactants

## APPLICANT(S) FOR DO/EO/US

SCHEPER, William Michael et al.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information.

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This express request to begin national examination procedures (35 U.S.C. 371(f) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(I).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application was filed (35 U.S.C. 371(c)(2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ has been transmitted by the International Bureau.
  - c. ☒ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.  
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☒ A change of power of attorney and/or address letter.
16. ☐ Other items or information:

"Express Mail" mailing label number


Date of Deposit

I hereby certify that this paper/fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to The Assistant Commissioner of Patents, Washington, D.C. 20231

Administrative Filing Application.

Signature

EL483620836 US  
20 August 2001  
*Margaret C. Byrd*

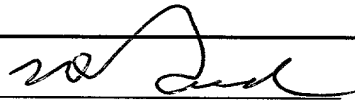U.S. APPLICATION NO. (If known, see 37 CFR 1.5) <b>09/913869</b>		INTERNATIONAL APPLICATION NO. PCT/US00/04185		ATTORNEY'S DOCKET NUMBER 7442	
				CALCULATIONS PTO USE ONLY	
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$710	
Surcharge of \$130.00 for furnishing the oath or declaration later than [ ] 20 [ ] 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$0	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total Claims	38-20 =	18	x \$18.00	\$324	
Independent Claims	1-3 =	0	x \$80.00	\$0	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			\$270.00	\$0	
TOTAL OF ABOVE CALCULATIONS =				\$1034	
Processing fee of \$130.00 for furnishing the English translation later than [ ] 20 [ ] 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$0	
TOTAL NATIONAL FEE =				\$1034	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28,3.31). \$40.00 per property +				\$0	
TOTAL FEES ENCLOSED =				\$1034	
				Amount to be refunded	\$
				charged	\$
<p>a. [ ] A check in the amount of \$ ____ to cover the above fees is enclosed.</p> <p>b. [ x ] Please charge my Deposit Account No. <u>16-2480</u> in the amount of \$ <u>1034</u> to cover the above fees. A duplicate copy of this sheet is enclosed.</p> <p>c. [ x ] The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>16-2480</u>. A duplicate copy of this sheet is enclosed.</p> <p>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</p> <p>SEND ALL CORRESPONDENCE TO:</p>					
K. L. Waugh, Patent Attorney Customer Number 27748				 Signature T. David Reed Name <u>32,931</u> Registration Number	

RECEIVED  
AUG 20 2001  
PCT/PTO

I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to: Assistant Commissioner for Patent, Washington, D C 20231 on Aug. 13, 2001

Kevin L. Waugh 47,206  
Name of Attorney Registration No

Signature of Attorney

Case 7442

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In the matter of

U.S. National Phase Entry  
Under 35 USC 371 from  
the International Application of  
**William Michael Scheper et al.**  
International Application No: PCT/US00/04185  
Filed in the RO/US on February 18, 2000  
Entitled: CLEANING COMPOSITIONS CONTAINING SELECTED NONIONIC  
SURFACTANTS

**PRELIMINARY AMENDMENT**

Box PCT  
Commissioner for Patents  
Washington, D.C. 20231

Dear Sir:

Before computing the fees for entering the captioned International Application into the U.S. National Phase, please enter the following amendments:

**IN THE CLAIMS**

Please amend Claim 1, cancel Claims 2-9 without prejudice, and insert new Claims 10-46 to read as follows:

1. (Amended) A detergent composition comprising:
  - a) a capped nonionic surfactant with an X/Y number greater than 1.00;
  - b) an optional conventional detergent additive;
  - c) an optional co-surfactant;

- d) an optional aqueous liquid carrier; and
- e) adjunct ingredients;

wherein said capped nonionic surfactant is selected from the group of compounds, including mixtures of compounds, described by  $C_xEO_yBO_z$ ; wherein x is 8 to 16; y is 4 to 14; z is less than or equal to 2.

10. (New) A detergent composition according to Claim 1, wherein said composition is a granular laundry composition comprising:

- a) said capped nonionic surfactant with an X/Y number greater than 1.00;
- b) said conventional detergent additive; and
- c) said co-surfactant;

wherein the granular laundry composition is in the form of a granule with a bulk density of from about 100 g/l to about 1400 g/l.

11. (New) A detergent composition according to Claim 1, wherein said composition is a nonaqueous heavy duty liquid laundry detergent composition in the form of a stable suspension of solid, substantially insoluble particulate material dispersed throughout a structured, surfactant-containing liquid phase, wherein said composition comprises:

- a) from about 55% to 98.9% by weight of said composition of a structured, surfactant-containing liquid phase formed by combining:
  - i) from about 1% to 80% by weight of said liquid phase of one or more nonaqueous organic diluents; and
  - ii) from about 20% to 99% by weight of said liquid phase of a surfactant system comprising surfactants selected from the group consisting of anionic, nonionic, cationic surfactants and combinations thereof;

wherein said surfactant system comprises at least about 10%, by weight of a capped nonionic surfactant with an X/Y number greater than 1.00.

12. (New) A detergent composition according to Claim 1, wherein said composition is an aqueous heavy duty liquid laundry detergent composition comprising:

- a) said capped nonionic surfactant with an X/Y number greater than 1.00;
- b) said conventional detergent additive; and
- c) said aqueous liquid carrier.

13. (New) A detergent composition according to Claim 1, wherein said composition is a light duty liquid detergent composition comprising:

- a) said capped nonionic surfactant with an X/Y number greater than 1.00;
- b) said conventional detergent additive; and

c) said co-surfactant;

wherein the light duty liquid detergent composition is in the form of a liquid, gel, or liqui-gel and the pH (as measured as 10% aqueous solution) is from about 5.0 to about 12.5.

14. (New) A detergent composition according to Claim 1, wherein said composition is a shampoo or personal cleansing composition comprising:

a) said capped nonionic surfactant with an X/Y number greater than 1.00;

b) said co-surfactant;

c) said adjunct ingredient is a shampoo composition adjunct ingredient;

wherein said shampoo or personal cleansing composition is in the form of a liquid, gel or liqui-gel.

15. (New) A detergent composition according to Claim 1, wherein said composition is a hard surface cleansing composition comprising:

a) said capped nonionic surfactant with an X/Y number greater than 1.00;

b) said co-surfactant;

c) said adjunct ingredient is a surface cleanser adjunct ingredient;

wherein said composition is in the form of a liquid, gel or liqui-gel.

16. (New) The composition according to Claim 1 wherein said capped nonionic surfactant is selected from the group consisting of C<sub>9</sub>,<sub>11</sub>PO<sub>3</sub>EO<sub>13</sub>PO<sub>15</sub>; C<sub>9</sub>,<sub>11</sub>PO<sub>3</sub>EO<sub>13</sub>BO<sub>6</sub>; C<sub>9</sub>,<sub>11</sub>PO<sub>3</sub>EO<sub>13</sub>BO<sub>3</sub>; C<sub>9</sub>,<sub>11</sub>EO<sub>13</sub>BO<sub>6</sub>; C<sub>9</sub>,<sub>11</sub>EO<sub>13</sub>BO<sub>3</sub>; C<sub>9</sub>,<sub>11</sub>BO<sub>1</sub>EO<sub>13</sub>BO<sub>3</sub>; C<sub>9</sub>,<sub>11</sub>EO<sub>8</sub>BO<sub>3</sub>; C<sub>12</sub>,<sub>15</sub>EO<sub>7</sub>BO<sub>2</sub>; C<sub>9</sub>,<sub>11</sub>EO<sub>8</sub>BO<sub>2</sub>; C<sub>9</sub>,<sub>11</sub>EO<sub>8</sub>BO<sub>1</sub>; C<sub>12</sub>,<sub>13</sub>EO<sub>6.5</sub>TBO<sub>1</sub>; C<sub>9</sub>,<sub>11</sub>EO<sub>8</sub>C(CH<sub>3</sub>)<sub>2</sub>CH<sub>2</sub>CH<sub>3</sub>; C<sub>11</sub>/15EO<sub>15</sub>PO<sub>6</sub>C<sub>12</sub>/14; C<sub>9</sub>,<sub>11</sub>EO<sub>8</sub>(CH<sub>2</sub>)<sub>4</sub>CH<sub>3</sub>; and mixtures thereof.

17 (New) The granular bleaching detergent according to Claim 10 wherein the bleach activator is selected from the group consisting of TAED, NOBS, amino-derived bleach activators, acyl lactam activators and mixtures thereof, and wherein further the bleach is selected from the group consisting of perborate, percarbonate, and mixtures thereof.


18. (New) The composition according to Claim 10 wherein the composition has a bulk density of at least 600g/litre.

19. (New) The detergent compositions according to Claim 10 wherein said co-surfactant comprises linear or branched-chain anionic surfactants selected from the group consisting of alkyl alkoxylated sulfates, alkyl sulfates, alkyl benzenesulfonates, and mixtures thereof.

20. (New) The granular detergent composition according to Claim 10 wherein said conventional detergent additive comprises:
- (a) from about 0.1% to about 30% by weight of a bleach; and
  - (b) from about 0.1% to about 60% by weight of a bleach activator.
21. (New) The detergent composition according to Claim 20, wherein said bleach activator is selected from the group consisting of (6-octanamido-caproyl) oxybenzenesulfonate, (6-nonanamidocaproyl) oxybenzenesulfonate, (6-decanamido-caproyl) oxybenzenesulfonate, and mixtures thereof.
22. (New) The detergent composition according to Claim 11, wherein said particulate material comprises from about 0.01% to about 50% by weight of the composition, said particulate material ranging in size from about 0.1 to about 1500 microns, and is selected from the group consisting of peroxygen bleaching agents, bleach activators, colored speckles, organic detergent builders, inorganic alkalinity sources, and mixtures thereof.
23. (New) The detergent composition according to Claim 11, wherein said surfactant system comprises from about 35% to about 70% of the non-aqueous liquid phase.
24. (New) The detergent composition according to Claim 11, further comprising from about 0.1 to about 8%, by weight of an alkyl dimethyl amine oxide and from about 0.05 to about 2%, by weight of magnesium ions.
25. (New) The detergent composition according to claim 11, further comprising 6-nonylamino-6-oxoperoxycaproic acid
26. (New) The detergent composition according to Claim 12, wherein said conventional detergent additive is selected from the group consisting of builders, bleaching compounds, polymeric dispersing agents, anti-redeposition agents polymeric soil release agents, enzymes, additional co-surfactants, and mixture thereof.
27. (New) The detergent composition according to Claim 13 wherein said co-surfactant is selected from the group consisting of, polyhydroxy fatty acid amides, betaines, sulfobetaines, alkyl polyglycosides, alkyl ethoxylates, amine oxides, and mixtures thereof.

28. (New) The detergent composition according to Claim 13 wherein said co-surfactant is selected from the group consisting of linear alkylbenzene sulfonate, alpha olefin sulfonate, paraffin sulfonates, methyl ester sulfonates, alkyl sulfates, alkyl alkoxy sulfate, alkyl sulfonates, alkyl alkoxyated sulfates, sarcosinates, taurinates, alkyl alkoxy carboxylate, and mixtures thereof.

29. (New) The detergent composition according to Claim 13 further comprising an organic diamine, wherein said diamine is selected from the group consisting of:



wherein R<sub>2-5</sub> are independently selected from H, methyl, ethyl, and ethylene oxides; C<sub>x</sub> and C<sub>y</sub> are independently selected from methylene groups or branched alkyl groups where x+y is from about 3 to about 6; and A is optionally present and is selected from electron donating or withdrawing moieties chosen to adjust the diamine pKa's to the desired range; wherein if A is present, then both x and y must be 2 or greater.


30. (New) The detergent composition according to Claim 31 wherein said diamine is selected from the group consisting of dimethyl aminopropyl amine, 1,6-hexane diamine, 1,3 propane diamine, 2-methyl 1,5 pentane diamine, 1,3-Pentanediamine, 1,3-diaminobutane, 1,2-bis(2-aminoethoxy)ethane, Isophorone diamine, 1,3-bis(methylamine)-cyclohexane, and mixtures thereof.

31. (New) The detergent composition according to Claim 13 further comprising from about 0.1% to about 15% by weight of a buffer with a pKa of from about 7 to about 10.


32. (New) The detergent composition according to Claim 31 wherein said buffer is selected from the group consisting of alkali metal carbonate, alkali metal phosphate, lysine, Tri(hydroxymethyl)amino methane, and mixtures thereof.

33. (New) The detergent composition according to Claim 13 further comprising a polymeric suds stabilizer selected from the group consisting of:

- i) homopolymers of (N,N-dialkylamino)alkyl acrylate esters having the formula:



wherein each R is independently hydrogen, C<sub>1</sub>-C<sub>8</sub> alkyl, and mixtures thereof, R<sup>1</sup> is hydrogen, C<sub>1</sub>-C<sub>6</sub> alkyl, and mixtures thereof, n is from 2 to about 6; and  
ii) copolymers of (i) and



wherein R<sup>1</sup> is hydrogen, C<sub>1</sub>-C<sub>6</sub> alkyl, and mixtures thereof; provided that the ratio of (ii) to (i) is from about 2 to 1 to about 1 to 2; and wherein said polymeric suds stabilizer has a molecular weight of from about 1,000 to about 2,000,000 daltons.

34. (New) The detergent composition according to Claim 14 wherein the co-surfactant is selected from the group consisting of anionic surfactants, cationic surfactants, nonionic surfactants, amphoteric surfactants, zwitterionic surfactants, and mixtures thereof.
35. (New) The detergent composition according to Claim 34 wherein said co-surfactant comprises linear or branched-chain anionic surfactants selected from the group consisting of alkyl alkoxyated sulfates, alkyl sulfates, alkyl benzenesulfonates, and mixtures thereof.
36. (New) The shampoo composition according to Claim 14 further comprising an antidandruff agent.
37. (New) The detergent compositions according to Claim 15 wherein said co-surfactant comprises linear or branched-chain anionic surfactants selected from the group consisting of alkyl alkoxyated sulfates, alkyl sulfates, alkyl benzenesulfonates, and mixtures thereof.
38. (New) The detergent composition according to Claim 1 comprising a deterative enzyme selected from the group consisting of proteases, lipases, cellulases, amylases, and mixtures thereof.




39. (New) The detergent composition according to claim 38, wherein the  $\alpha$ -amylase is obtained from an alkalophilic *Bacillus* species, and comprises the following amino sequence in the N-terminal: His-His-Asn-Gly-Thr-Asn-Gly-Thr-Met-Met-Gln-Tyr-Phe-Glu-Trp-Tyr-Leu-Pro-Asn-Asp.
40. (New) The detergent compositions according to Claim 1 further comprising an  $\alpha$ -amylases having a specific activity at least 25% higher than the specific activity of Termamyl<sup>®</sup> at a temperature range of 25°C to 55°C and at a pH value in the range of 8 to 10, measured by the Phadebas<sup>®</sup>  $\alpha$ -amylase activity assay.
41. (New) The detergent composition according to Claim 1 further comprising a hydrotrope.
42. (New) The composition according to Claim 1 further comprising a builder.
43. (New) The detergent composition according to Claim 1 further comprising one or more deterative adjuncts selected from the following: soil release polymers, polymeric dispersants, polysaccharides, abrasives, bactericides, tarnish inhibitors, builders, enzymes, dyes, perfumes, thickeners, antioxidants, processing aids, suds boosters, buffers, antifungal or mildew control agents, insect repellants, anti-corrosive aids, chelants, and mixtures thereof.
44. (New) A method of bleaching fabrics, said method comprises administering an effective amount of the composition according to Claim 10 to fabric in need of bleaching.
45. (New) A method of cleaning fabrics, said method comprises administering an effective amount of the composition to Claim 10 to fabric in need of cleaning.
46. (New) A method of washing tableware said method comprising contacting soiled tableware in need of cleaning with an aqueous solution of the composition according to Claim 13.

#### STATUS OF THE CLAIMS

The support for these amendments is found in the claims and specification as originally filed. These amendments are being entered to bring the claims into conformance with, *inter alia*, 37 CFR 1.75. No new matter is added. Claims 1 and 10 thru 46 are now pending in this application.

Respectfully submitted,

For: **William Michael Scheper et al.**

By   
\_\_\_\_\_  
Kevin L. Waugh  
Attorney/Agent for Applicants  
Registration No. 47,206  
Tele. No.: (513) 627-1644

August \_\_\_, 2001  
Cincinnati, Ohio  
(7442 PrelimAmend- doc)

**VERSION WITH MARKED UP CHANGES**  
**IN THE CLAIMS**

Claim 1 has been amended as follows:

1. (Amended) A [granular laundry] detergent composition comprising:
  - a) a capped nonionic surfactant with an X/Y number greater than 1.00;
  - b) [a] an optional conventional detergent additive; [and]
  - c) [a] an optional co-surfactant;
  - d) an optional aqueous liquid carrier; and
  - e) adjunct ingredients;

[wherein the composition is in the form of a granule with a bulk density of from 100 g/l to 1400 g/l] wherein said capped nonionic surfactant is selected from the group of compounds, including mixtures of compounds, described by C<sub>x</sub>EO<sub>y</sub>BO<sub>z</sub>; wherein x is 8 to 16; y is 4 to 14; z is less than or equal to 2.

Claims 2-9 have been canceled without prejudice.

New Claims 10-46 have been added.

On account of the foregoing technical constraints as well as consumer needs and demands, product compositions are undergoing continual change and improvement. Moreover environmental factors such as the need for biodegradable materials, the restriction of phosphate, the desirability of providing ever-better cleaning results with less product, providing less thermal energy demand, and less water to assist the washing process, have all driven the need for improved compositions.

Accordingly, the need remains for new surfactants which are suitable for use in a variety of compositions which can provide improved dissolution of solid products like bars and granular products, improved rates of mixing with water as with liquid products, improved streaking and filming performance as in hard surface cleaners, good cleaning and good biodegradability.

#### SUMMARY OF THE INVENTION

This need is met by the present invention wherein detergent compositions having a selected nonionic surfactant are provided. The compositions employ the novel surfactants of the present invention, either alone or in combination with other surfactants, to provide improved dissolution of solid products like granules, improved rates of mixing with water for liquid products, and improved dry-down optical properties on hard surfaces, while at the same time providing acceptable cleaning performance, foaming properties and aesthetics.

According to the first embodiment a granular laundry detergent composition is provided. The granular laundry composition comprises:

- a) a butoxycapped nonionic surfactant;
- b) a conventional detergent additive; and
- c) a co-surfactant;

wherein the composition is in the form of a granule with a bulk density of from about 100 g/l to about 1400 g/l.

According to the second embodiment a nonaqueous heavy duty liquid (HDL) laundry detergent composition is provided. The nonaqueous HDL composition in the form of a stable suspension of solid, substantially insoluble particulate material dispersed throughout a structured, surfactant-containing liquid phase, wherein the composition comprises:

from about 55% to 98.9% by weight of the composition of a structured, surfactant-containing liquid phase formed by combining:

- i) from about 1% to 80% by weight of said liquid phase of one or more nonaqueous organic diluents; and
- ii) from about 20% to 99% by weight of said liquid phase of a surfactant system comprising surfactants selected from the group consisting of anionic, nonionic, cationic surfactants and combinations thereof;

wherein said surfactant system comprises at least about 10%, by weight of a butoxycapped nonionic surfactant.

According to the third embodiment an aqueous heavy duty liquid (HDL) laundry detergent composition is provided. The aqueous HDL composition comprises:

- a) a butoxycapped nonionic surfactant;
- b) an amide co-surfactant composition selected from the group consisting of alkyl polyhydroxy fatty acid amide, alkyl amidopropyl dimethyl amine and mixtures thereof;
- 5 c) a conventional detergent additive; and
- d) an aqueous liquid carrier.

The HDL compositions defined herein may also preferably comprise from about 1% to about 80% by weight of the composition of additional detergent ingredients such as builders, enzymes, colorants, bleaching agents, bleach activators, and other known ingredients. In the  
10 nonaqueous compositions adjuvants can be added in the form of particulate material which ranges in size from about 0.1 to about 1500 microns, which is substantially insoluble in the liquid phase and which is selected from the group consisting of peroxygen bleaching agents, bleach activators, colored speckles, organic detergent builders, inorganic alkalinity sources and mixtures thereof.

According to the fourth embodiment a light duty liquid (LDL) detergent composition is  
15 provided. The aqueous LDL composition comprises:

- a) a butoxycapped nonionic surfactant;
- b) a conventional detergent additive;
- c) a co-surfactant;

wherein the composition is in the form of a liquid, gel, or liqui-gel and the pH (as measured as  
20 10% aqueous solution) is from about 5.0 to about 12.5.

According to the fifth embodiment a hard surface cleaning composition is provided. The hard surface cleaning composition comprises:

- a) a butoxy capped nonionic surfactant;
- b) a co-surfactant;
- 25 c) a hard surface cleaning composition adjunct ingredient;

wherein said composition is in the form of a liquid, gel or liqui-gel.

According to the sixth embodiment a shampoo, or personal cleansing composition is provided. The shampoo composition comprises:

- a) a butoxycapped nonionic surfactant;
- 30 b) a co-surfactant;
- c) a solvent
- d) a shampoo composition adjunct ingredient;

wherein said composition is in the form of a liquid, gel or liqui-gel.

All percentages, ratios and proportions herein are by weight of ingredients used to prepare the finished compositions unless otherwise specified. All documents cited herein are, in relevant part, incorporated herein by reference.

### DETAILED DESCRIPTION OF THE INVENTION

Once again, the present invention is directed toward a low-foaming nonionic surfactant for use in detergent compositions. The disclosed compounds of the present invention may also be employed in laundry and skin care compositions.


#### Selected Nonionic Surfactant System

The essential nonionic surfactants of the present invention must have an X/Y number of greater than 1.00, preferably greater than 1.10, more preferably greater than 1.30. The determination of this X/Y number is described hereinafter. It has been surprisingly found that surfactants with an X/Y number greater than 1.00 demonstrate superior cleaning to nonionic surfactants with a X/Y number of 1.00 or less. When the nonionic surfactant contains a glyceryl ether group then the X/Y number is calculated exclusive of any possible dimers and trimers. That is any dimers and trimers present are not used to calculate the X/Y value for any nonionic surfactant containing a glyceryl ether group.

Furthermore these surfactants provide suds control and in combination with the oxide surfactant provide a level of suds which is suitable for use in an ADW composition. Furthermore, the nonionic surfactant of the present invention have minimal negative interaction with the cleaning of the oxide surfactant.


Suitable surfactants include ethoxy and propoxy containing ether-capped poly(oxyalkylated) alcohol surfactants, ethoxy and butoxy containing ether-capped poly(oxyalkylated) alcohol surfactants, ethoxy and butoxy containing alkylalkoxylates, and ethoxy, propoxy and butoxy containing alkylalkoxylates. However, when the LFNI surfactant contains a glyceryl ether-group then it is preferred that the amount of any possible dimer or trimer present be minimized. The amount of dimer and trimer is minimized to levels such that these have minimal negative interaction with the cleaning of the oxide surfactant. The amount of dimer and trimer present in the glyceryl ether containing surfactant is dependent upon the process used to produce the surfactant. The preferred method for minimizing or eliminating the formation of dimer and trimer maybe controlled by the stoichiometry of the reactants or via typical purification methods (e.g. Chromatography, crystallization, fictionalization etc.).

One preferred LFNI of the present invention have the formula:



wherein R<sup>1</sup> is a linear or branched C<sub>6</sub> to C<sub>20</sub> alkyl, preferably linear or branched C<sub>8</sub> to C<sub>18</sub> alkyl, more preferably linear or branched C<sub>9</sub> to C<sub>16</sub> alkyl; a is an integer from 2 to 30, preferably from 4 to 25, more preferably from 5 to 20 more preferably from 5 to 18; b is an integer from 0 to 30 preferably from 0 to 25, more preferably from 0 to 20, more preferably from 0 to 10; c is an integer from 1 to 10 preferably from 1 to 9, more preferably from 1 to 7, more preferably from 1 to 6.

Another preferred LFNI of the present invention has the formula:



wherein R<sup>1</sup> and R<sup>2</sup> are linear or branched, saturated or unsaturated, aliphatic or aromatic hydrocarbon radicals having from 1 to 30 carbon atoms; R<sup>3</sup> is H, or a linear aliphatic hydrocarbon radical having from 1 to 4 carbon atoms; m is an integer having an average value from 1 to 40, wherein when m is 2 or greater R<sup>3</sup> may be the same or different and k and j are integers having an average value of from 1 to 12; further wherein when m is 15 or greater and R<sup>3</sup> is H and methyl, at least four of R<sup>3</sup> are methyl, further wherein when m is 15 or greater and R<sup>3</sup> includes H and from 1 to 3 methyl groups, then at least one R<sup>3</sup> is ethyl, propyl or butyl, further wherein R<sup>2</sup> can optionally be alkoxylated, wherein said alkoxy is selected from ethoxy, propoxy, butyloxy and mixtures thereof; wherein further, said surfactant has less than 30%, preferably less than 15% and most preferably less than 5% of dimers and trimers of said nonionic surfactant.

Another preferred LFNI of the present invention has the formula:



wherein R<sup>1</sup> is a linear or branched, saturated or unsaturated, aliphatic or aromatic hydrocarbon radicals having from 1 to 30 carbon atoms; R<sup>2</sup> is a linear or branched, saturated or unsaturated, aliphatic or aromatic hydrocarbon radicals having from 1 to 30 carbon atoms, optionally containing from 1 to 5 hydroxy groups; and further optionally substituted with an ether group; R<sup>3</sup> is H, or a linear aliphatic hydrocarbon radical having from 1 to 4 carbon atoms; e is an integer having an average value from 1 to 40, wherein R<sup>2</sup> can optionally be alkoxylated, wherein said alkoxy is selected from ethoxy, propoxy, butyloxy and mixtures thereof.

Suitable surfactants include, but are not limited to,

Surfactant	X/Y value
C9,11PO3EO13BO6	1.41
C9,11PO3EO13BO3	1.70
C9,11EO13BO6	1.49
C9,11EO13BO3	1.88
C9,11BO1EO13BO3	1.72




C9,11EO8BO3	1.29
C12,15EO7BO2	1.03
C9,11EO8BO2	1.41
C9,11EO8BO1	1.58
C12,13EO6.5T*BO1	1.10

\*: Denotes topped, or narrow selection of EO distribution.

#### Calculation of X/Y

The LFNI surfactants of the present invention must all have a ratio of hydrophobic to hydrophilic, or "X/Y" number of greater than or equal to 1.00.

- 5 The calculation of "X/Y" is as follows. For a given alkoxyated nonionic surfactant structure, "X" is defined as the sum of the protons attached to carbon atoms that are adjacent to oxygen. "Y" is defined as the sum of all the protons attached to carbon atoms within said molecule that are non-adjacent to oxygen. That is,

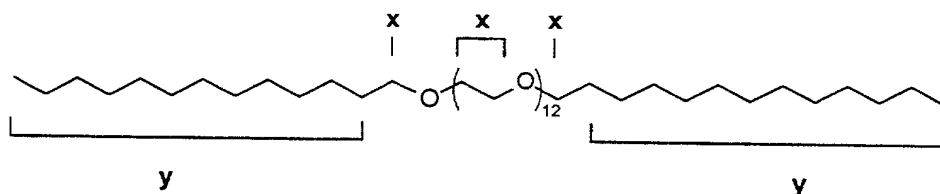

- 10 A typical example is shown below. For  $C_{13}EO_{12}C_{13}$ ,  $X = 52$  and  $Y = 50$ .  
Therefore,  $X/Y = 52/50 = 1.04$ .

- $X/Y$  can also be measured experimentally from integration of the  $^1H$  NMR spectrum. The "X" protons are represented as the peak area defined by the region of the spectrum from  $\delta$  3.0 to 4.0 ppm. The "Y" protons are represented as the peak area defined from  $\delta$  0.5 to 2.0 ppm.  
15  $X/Y$  is then calculated by dividing the peak area from 3.0 to 4.0 ppm by the peak area from 0.5 to 2.0 ppm.

#### Laundry or Cleaning Adjunct Materials and Methods:

- In general, a laundry or cleaning adjunct is any material required to transform a composition containing only the minimum essential ingredients into a composition useful for  
20 laundry or cleaning purposes, such as a LDL, HDL or shampoo. In preferred embodiments, laundry or cleaning adjuncts are easily recognizable to those of skill in the art as being absolutely characteristic of laundry or cleaning products, especially of laundry or cleaning products intended for direct use by a consumer in a domestic environment.

The precise nature of these additional components, and levels of incorporation thereof, will depend on the physical form of the composition and the nature of the cleaning operation for which it is to be used.

5 Preferably, the adjunct ingredients if used with bleach should have good stability therewith. Certain preferred detergent compositions herein should be boron-free and/or phosphate-free as required by legislation. Levels of adjuncts are from about 0.00001% to about 99.9%, by weight of the compositions. Use levels of the overall compositions can vary widely depending on the intended application, ranging for example from a few ppm in solution to so-called "direct application" of the neat cleaning composition to the surface to be cleaned.

10 Common adjuncts include builders, co-surfactants, enzymes, polymers, bleaches, bleach activators, catalytic materials and the like excluding any materials already defined hereinabove as part of the essential component of the inventive compositions. Other adjuncts herein can include diverse active ingredients or specialized materials, for example, dispersant polymers (e.g., from BASF Corp. or Rohm & Haas), color speckles, silvercare, anti-tarnish and/or anti-corrosion  
15 agents, dyes, fillers, germicides, bactericides, alkalinity sources, hydrotropes, anti-oxidants, enzyme stabilizing agents, suds boosters, buffers, anti-fungal agents, mildew control agents, insect repellents, anti-corrosive aids, chelants suds suppressors thickeners, abrasives, pro-perfumes, perfumes, solubilizing agents, carriers, processing aids, pigments, and, for liquid formulations, solvents, as described in detail hereinafter.

20 Co-surfactants:

The surfactant system of the compositions according to the present invention may further comprise additional surfactants, herein also referred to as co-surfactants, preferably selected from: anionic surfactants, preferably selected from the group of alkyl alkoxylated sulfates, alkyl sulfates, alkyl disulfates, and/or linear alkyl benzenesulfonate surfactants; cationic surfactants,  
25 preferably selected from quaternary ammonium surfactants; nonionic surfactants, preferably alkyl ethoxylates, alkyl polyglucosides, polyhydroxy fatty acid amides, and/or amine or amine oxide surfactants; amphoteric surfactants, preferably selected from betaines and/or polycarboxylates (for example polyglycinates); and zwitterionic surfactants.

A wide range of these co-surfactants can be used in the cleaning compositions of the  
30 present invention. A typical listing of anionic, nonionic, ampholytic and zwitterionic classes, and species of these co-surfactants, is given in US Patent 3,664,961 issued to Norris on May 23, 1972. Amphoteric surfactants are also described in detail in "Amphoteric Surfactants, Second Edition", E.G. Lomax, Editor (published 1996, by Marcel Dekker, Inc.). Suitable surfactants can be found in U.S. Patent applications Serial Nos. 60/032,035 (Docket No. 6401P), 60/031,845 (Docket No.

6402P), 60/031,916 (Docket No. 6403P), 60/031,917 (Docket No. 6404P), 60/031,761 (Docket No. 6405P), 60/031,762 (Docket No. 6406P), 60/031,844 (Docket No. 6409P), No. 60/061,971, Attorney docket No 6881P October 14, 1997, No. 60/061,975, Attorney docket No 6882P October 14, 1997, No. 60/062,086, Attorney docket No 6883P October 14, 1997, No. 60/061,916, Attorney docket No 6884P October 14, 1997, No. 60/061,970, Attorney docket No 6885P October 14, 1997, No. 60/062,407, Attorney docket No 6886P October 14, 1997, 60/053,319 filed on July 21 1997 (Docket No. 6766P), 60/053,318 filed on July 21 1997 (Docket No. 6767P), 60/053,321 filed on July 21 1997 (Docket No. 6768P), 60/053,209 filed on July 21 1997 (Docket No. 6769P), 60/053,328 filed on July 21 1997 (Docket No. 6770P), 60/053,186 filed on July 21 1997 (Docket No. 6771P), 60/053,437 filed on August 8 1997 (Docket No. 6796P), 60/105,017 filed on October 20 1998 (Docket No. 7303P), and 60/104,962 filed on October 20 1998 (Docket No. 7304P all of which are incorporated herein by reference.

The compositions of the present invention preferably comprise from about 0.01% to about 55%, more preferably from about 0.1% to about 45%, more preferably from about 0.25% to about 30%, more preferably from about 0.5% to about 20%, by weight of co-surfactants. Selected co-surfactants are further identified as follows.

(1) Anionic Co-surfactants:

Nonlimiting examples of anionic co-surfactants useful herein, typically at levels from about 0.1% to about 50%, by weight, include the conventional C<sub>11</sub>-C<sub>18</sub> alkyl benzene sulfonates ("LAS") and primary, branched-chain and random C<sub>10</sub>-C<sub>20</sub> alkyl sulfates ("AS"), the C<sub>10</sub>-C<sub>18</sub> secondary (2,3) alkyl sulfates of the formula CH<sub>3</sub>(CH<sub>2</sub>)<sub>x</sub>(CHOSO<sub>3</sub><sup>-</sup>M<sup>+</sup>) CH<sub>3</sub> and CH<sub>3</sub>(CH<sub>2</sub>)<sub>y</sub>(CHOSO<sub>3</sub><sup>-</sup>M<sup>+</sup>) CH<sub>2</sub>CH<sub>3</sub> where x and (y + 1) are integers of at least about 7, preferably at least about 9, and M is a water-solubilizing cation, especially sodium, unsaturated sulfates such as oleyl sulfate, the C<sub>10</sub>-C<sub>18</sub> alpha-sulfonated fatty acid esters, the C<sub>10</sub>-C<sub>18</sub> sulfated alkyl polyglycosides, the C<sub>10</sub>-C<sub>18</sub> alkyl alkoxy sulfates ("AE<sub>x</sub>S"; especially EO 1-7 ethoxy sulfates), and C<sub>10</sub>-C<sub>18</sub> alkyl alkoxy carboxylates (especially the EO 1-5 ethoxycarboxylates). The C<sub>12</sub>-C<sub>18</sub> betaines and sulfobetaines ("sultaines"), C<sub>10</sub>-C<sub>18</sub> amine oxides, and the like, can also be included in the overall compositions. C<sub>10</sub>-C<sub>20</sub> conventional soaps may also be used. If high sudsing is desired, the branched-chain C<sub>10</sub>-C<sub>16</sub> soaps may be used. Other conventional useful anionic co-surfactants are listed in standard texts.

Other suitable anionic surfactants that can be used are alkyl ester sulfonate surfactants including linear esters of C<sub>8</sub>-C<sub>20</sub> carboxylic acids (i.e., fatty acids) which are sulfonated with gaseous SO<sub>3</sub> according to "The Journal of the American Oil Chemists Society", 52 (1975), pp.

323-329. Suitable starting materials would include natural fatty substances as derived from tallow, palm oil, etc.

Another type of useful surfactants are the so-called dianionics. These are surfactants which have at least two anionic groups present on the surfactant molecule. Some suitable dianionic surfactants are further described in copending U.S. Serial No. 60/020,503 (Docket No. 6160P), 60/020,772 (Docket No. 6161P), 60/020,928 (Docket No. 6158P), 60/020,832 (Docket No. 6159P) and 60/020,773 (Docket No. 6162P) all filed on June 28, 1996, and 60/023,539 (Docket No. 6192P), 60/023,493 (Docket No. 6194P), 60/023,540 (Docket No. 6193P) and 60/023,527 (Docket No. 6195P) filed on August 8th, 1996, the disclosures of which are incorporated herein by reference.

Additionally and preferably, the surfactant may be a branched alkyl sulfate, branched alkyl alkoxylate, or branched alkyl alkoxylate sulfate. These surfactants are further described in No. 60/061,971, Attorney docket No 6881P October 14, 1997, No. 60/061,975, Attorney docket No 6882P October 14, 1997, No. 60/062,086, Attorney docket No 6883P October 14, 1997, No. 60/061,916, Attorney docket No 6884P October 14, 1997, No. 60/061,970, Attorney docket No 6885P October 14, 1997, No. 60/062,407, Attorney docket No 6886P October 14, 1997. Other suitable mid-chain branched surfactants can be found in U.S. Patent applications Serial Nos. 60/032,035 (Docket No. 6401P), 60/031,845 (Docket No. 6402P), 60/031,916 (Docket No. 6403P), 60/031,917 (Docket No. 6404P), 60/031,761 (Docket No. 6405P), 60/031,762 (Docket No. 6406P) and 60/031,844 (Docket No. 6409P). Mixtures of these branched surfactants with conventional linear surfactants are also suitable for use in the present compositions.

Additionally, the surfactant may be a modified alkylbenzene sulfonate surfactants, or MLAS. Suitable MLAS surfactants can be found in U.S. Patent applications Serial Nos. 60/053,319 filed on July 21 1997 (Docket No. 6766P), 60/053,318 filed on July 21 1997 (Docket No. 6767P), 60/053,321 filed on July 21 1997 (Docket No. 6768P), 60/053,209 filed on July 21 1997 (Docket No. 6769P), 60/053,328 filed on July 21 1997 (Docket No. 6770P), 60/053,186 filed on July 21 1997 (Docket No. 6771P), 60/053,437 filed on August 8 1997 (Docket No. 6796P), 60/105,017 filed on October 20 1998 (Docket No. 7303P), and 60/104,962 filed on October 20 1998 (Docket No. 7304P). Mixtures of these branched surfactants with conventional linear surfactants are also suitable for use in the present compositions.

The anionic surfactants useful in the LDL of the present invention are preferably selected from the group consisting of, linear alkylbenzene sulfonate, alpha olefin sulfonate, paraffin sulfonates, alkyl ester sulfonates, alkyl sulfates, alkyl alkoxy sulfate, alkyl sulfonates, alkyl alkoxy carboxylate, alkyl alkoxylated sulfates, sarcosinates, taurinates, and mixtures thereof. An

effective amount, typically from about 0.5% to about 90%, preferably about 5% to about 50%, more preferably from about 10 to about 30%, by weight of anionic deterative surfactant can be used in the LDL compositions of the present invention.


When included therein, the laundry detergent compositions of the present invention typically comprise from about 0.1% to about 50%, preferably from about 1% to about 40% by weight of an anionic surfactant.

(2) Nonionic Co-surfactants:

Nonlimiting examples of nonionic co-surfactants useful herein typically at levels from about 0.1% to about 50%, by weight include the alkoxyated alcohols (AE's) and alkyl phenols, polyhydroxy fatty acid amides (PFAA's), alkyl polyglycosides (APG's), C<sub>10</sub>-C<sub>18</sub> glycerol ethers, and the like.

Examples of commercially available nonionic surfactants of this type include: Tergitol<sup>TM</sup> 15-S-9 (the condensation product of C<sub>11</sub>-C<sub>15</sub> linear alcohol with 9 moles ethylene oxide) and Tergitol<sup>TM</sup> 24-L-6 NMW (the condensation product of C<sub>12</sub>-C<sub>14</sub> primary alcohol with 6 moles ethylene oxide with a narrow molecular weight distribution), both marketed by Union Carbide Corporation; Neodol<sup>TM</sup> 45-9 (the condensation product of C<sub>14</sub>-C<sub>15</sub> linear alcohol with 9 moles of ethylene oxide), Neodol<sup>TM</sup> 23-3 (the condensation product of C<sub>12</sub>-C<sub>13</sub> linear alcohol with 3 moles of ethylene oxide), Neodol<sup>TM</sup> 45-7 (the condensation product of C<sub>14</sub>-C<sub>15</sub> linear alcohol with 7 moles of ethylene oxide) and Neodol<sup>TM</sup> 45-5 (the condensation product of C<sub>14</sub>-C<sub>15</sub> linear alcohol with 5 moles of ethylene oxide) marketed by Shell Chemical Company; Kyro<sup>TM</sup> EOB (the condensation product of C<sub>13</sub>-C<sub>15</sub> alcohol with 9 moles ethylene oxide), marketed by The Procter & Gamble Company; and Genapol LA O3O or O5O (the condensation product of C<sub>12</sub>-C<sub>14</sub> alcohol with 3 or 5 moles of ethylene oxide) marketed by Hoechst. The preferred range of HLB in these AE nonionic surfactants is from 8-17 and most preferred from 8-14. Condensates with propylene oxide and butylene oxides may also be used.

Another class of preferred nonionic co-surfactants for use herein are the polyhydroxy fatty acid amide surfactants of the formula.




wherein R<sup>1</sup> is H, or C<sub>1-4</sub> hydrocarbyl, 2-hydroxy ethyl, 2-hydroxy propyl or a mixture thereof, R<sup>2</sup> is C<sub>5-31</sub> hydrocarbyl, and Z is a polyhydroxyhydrocarbyl having a linear hydrocarbyl chain with at least 3 hydroxyls directly connected to the chain, or an alkoxyated derivative thereof.

Typical examples include the C<sub>12</sub>-C<sub>18</sub> and C<sub>12</sub>-C<sub>14</sub> N-methylglucamides. See U.S. 5,194,639 and 5,298,636. N-alkoxy polyhydroxy fatty acid amides can also be used; see U.S. 5,489,393.

Also useful as a nonionic co-surfactant in the present invention are the alkylpolysaccharides such as those disclosed in U.S. Patent 4,565,647, Llenado, issued January 21, 1986.

Preferred alkylpolyglycosides have the formula



wherein R<sup>2</sup> is selected from the group consisting of alkyl, alkylphenyl, hydroxyalkyl, hydroxyalkylphenyl, and mixtures thereof in which the alkyl groups contain from about 10 to about 18, preferably from about 12 to about 14, carbon atoms; n is 2 or 3, preferably 2; t is from 0 to about 10, preferably 0; and x is from about 1.3 to about 10, preferably from about 1.3 to about 3, most preferably from about 1.3 to about 2.7. The glycosyl is preferably derived from glucose.

To prepare these compounds, the alcohol or alkylpolyethoxy alcohol is formed first and then reacted with glucose, or a source of glucose, to form the glucoside (attachment at the 1-position).

The additional glycosyl units can then be attached between their 1-position and the preceding glycosyl units 2-, 3-, 4- and/or 6-position, preferably predominately the 2-position. Compounds of this type and their use in detergent are disclosed in EP-B 0 070 077, 0 075 996 and 0 094 118.


Polyethylene, polypropylene, and polybutylene oxide condensates of alkyl phenols are also suitable for use as the nonionic surfactant of the surfactant systems of the present invention, with the polyethylene oxide condensates being preferred. These compounds include the condensation products of alkyl phenols having an alkyl group containing from about 6 to about 14 carbon atoms, preferably from about 8 to about 14 carbon atoms, in either a straight-chain or branched-chain configuration with the alkylene oxide. In a preferred embodiment, the ethylene oxide is present in an amount equal to from about 2 to about 25 moles, more preferably from about 3 to about 15 moles, of ethylene oxide per mole of alkyl phenol. Commercially available nonionic surfactants of this type include Igepal<sup>TM</sup> CO-630, marketed by the GAF Corporation; and Triton<sup>TM</sup> X-45, X-114, X-100 and X-102, all marketed by the Rohm & Haas Company. These surfactants are commonly referred to as alkylphenol alkoxylates (e.g., alkyl phenol ethoxylates).

The condensation products of ethylene oxide with a hydrophobic base formed by the condensation of propylene oxide with propylene glycol are also suitable for use as the additional nonionic surfactant in the present invention. The hydrophobic portion of these compounds will preferably have a molecular weight of from about 1500 to about 1800 and will exhibit water insolubility. The addition of polyoxyethylene moieties to this hydrophobic portion tends to

increase the water solubility of the molecule as a whole, and the liquid character of the product is retained up to the point where the polyoxyethylene content is about 50% of the total weight of the condensation product, which corresponds to condensation with up to about 40 moles of ethylene oxide. Examples of compounds of this type include certain of the commercially-available  
 5 Pluronic<sup>TM</sup> surfactants, marketed by BASF.

Also suitable for use as the nonionic surfactant of the nonionic surfactant system of the present invention, are the condensation products of ethylene oxide with the product resulting from the reaction of propylene oxide and ethylenediamine. The hydrophobic moiety of these products consists of the reaction product of ethylenediamine and excess propylene oxide, and  
 10 generally has a molecular weight of from about 2500 to about 3000. This hydrophobic moiety is condensed with ethylene oxide to the extent that the condensation product contains from about 40% to about 80% by weight of polyoxyethylene and has a molecular weight of from about 5,000 to about 11,000. Examples of this type of nonionic surfactant include certain of the commercially available Tetronic<sup>TM</sup> compounds, marketed by BASF.

Also preferred nonionics are amine oxide surfactants. The compositions of the present invention may comprise amine oxide in accordance with the general formula I:



In general, it can be seen that the structure (I) provides one long-chain moiety  $R^1(EO)_x(PO)_y(BO)_z$  and two short chain moieties,  $CH_2R'$ .  $R'$  is preferably selected from  
 20 hydrogen, methyl and  $-CH_2OH$ . In general  $R^1$  is a primary or branched hydrocarbyl moiety which can be saturated or unsaturated, preferably,  $R^1$  is a primary alkyl moiety. When  $x+y+z = 0$ ,  $R^1$  is a hydrocarbyl moiety having chainlength of from about 8 to about 18. When  $x+y+z$  is different from 0,  $R^1$  may be somewhat longer, having a chainlength in the range  $C_{12}-C_{24}$ . The general formula also encompasses amine oxides wherein  $x+y+z = 0$ ,  $R^1 = C_8-C_{18}$ ,  $R' = H$  and  $q$   
 25  $= 0-2$ , preferably 2. These amine oxides are illustrated by  $C_{12-14}$  alkyldimethyl amine oxide, hexadecyl dimethylamine oxide, octadecylamine oxide and their hydrates, especially the dihydrates as disclosed in U.S. Patents 5,075,501 and 5,071,594, incorporated herein by reference.


The invention also encompasses amine oxides wherein  $x+y+z$  is different from zero, specifically  $x+y+z$  is from about 1 to about 10,  $R^1$  is a primary alkyl group containing 8 to about  
 30 24 carbons, preferably from about 12 to about 16 carbon atoms; in these embodiments  $y + z$  is preferably 0 and  $x$  is preferably from about 1 to about 6, more preferably from about 2 to about 4; EO represents ethyleneoxy; PO represents propyleneoxy; and BO represents butyleneoxy. Such amine oxides can be prepared by conventional synthetic methods, e.g., by the reaction of

alkylethoxysulfates with dimethylamine followed by oxidation of the ethoxylated amine with hydrogen peroxide.

Highly preferred amine oxides herein are solutions at ambient temperature. Amine oxides suitable for use herein are made commercially by a number of suppliers, including Akzo Chemie, Ethyl Corp., and Procter & Gamble. See McCutcheon's compilation and Kirk-Othmer review article for alternate amine oxide manufacturers.




Whereas in certain of the preferred embodiments R' is H, there is some latitude with respect to having R' slightly larger than H. Specifically, the invention further encompasses embodiments wherein R' is CH<sub>2</sub>OH, such as hexadecylbis(2-hydroxyethyl)amine oxide, tallowbis(2-hydroxyethyl)amine oxide, stearylbis(2-hydroxyethyl)amine oxide and oleylbis(2-hydroxyethyl)amine oxide, dodecyl dimethylamine oxide dihydrate.

Preferred amines for use herein include amines according to the formula:




wherein R<sub>1</sub> is a C<sub>6</sub>-C<sub>12</sub> alkyl group; n is from about 2 to about 4, X is a bridging group which is selected from NH, CONH, COO, or O or X can be absent; and R<sub>3</sub> and R<sub>4</sub> are individually selected from H, C<sub>1</sub>-C<sub>4</sub> alkyl, or (CH<sub>2</sub>-CH<sub>2</sub>-O(R<sub>5</sub>)) wherein R<sub>5</sub> is H or methyl.

These preferred amines include the following:



wherein R<sub>1</sub> is a C<sub>6</sub>-C<sub>12</sub> alkyl group and R<sub>5</sub> is H or CH<sub>3</sub>.

In a highly preferred embodiment, the amine is described by the formula:



wherein R<sub>1</sub> is C<sub>8</sub>-C<sub>12</sub> alkyl.

Particularly preferred amines include those selected from the group consisting of octyl amine, hexyl amine, decyl amine, dodecyl amine, C<sub>8</sub>-C<sub>12</sub> bis(hydroxyethyl)amine, C<sub>8</sub>-C<sub>12</sub> bis(hydroxyisopropyl)amine, and C<sub>8</sub>-C<sub>12</sub> amido-propyl dimethyl amine, and mixtures.


### (3) Cationic Co-surfactants:

Nonlimiting examples of cationic co-surfactants useful herein typically at levels from about 0.1% to about 50%, by weight include the choline ester-type quats and alkoxylated quaternary ammonium (AQA) surfactant compounds, and the like. Most preferred for aqueous liquid compositions herein are soluble cationic co-surfactants which do not readily hydrolyze in the product.



Cationic co-surfactants useful as a component of the surfactant system is a cationic choline ester-type quat surfactant which are preferably water dispersible compounds having surfactant properties and comprise at least one ester (i.e. -COO-) linkage and at least one cationically charged group. Suitable cationic ester surfactants, including choline ester surfactants, have for example been disclosed in U.S. Patents Nos. 4,228,042, 4,239,660 and 4,260,529.

Cationic ester surfactants include those having the formula:




wherein  $R_1$  is a  $C_5$ - $C_{31}$  linear or branched alkyl, alkenyl or alkaryl chain or  $M^-$ .  $N^+(R_6R_7R_8)(CH_2)_8$ ; X and Y, independently, are selected from the group consisting of  $COO^-$ ,  $OCO$ ,  $O$ ,  $CO$ ,  $OCOO$ ,  $CONH$ ,  $NHCO$ ,  $OCONH$  and  $NHCOO$  wherein at least one of X or Y is a  $COO^-$ ,  $OCO$ ,  $OCOO$ ,  $OCONH$  or  $NHCOO$  group;  $R_2$ ,  $R_3$ ,  $R_4$ ,  $R_6$ ,  $R_7$  and  $R_8$  are independently selected from the group consisting of alkyl, alkenyl, hydroxyalkyl, hydroxyalkenyl and alkaryl groups having from 1 to 4 carbon atoms; and  $R_5$  is independently H or a  $C_1$ - $C_3$  alkyl group; wherein the values of m, n, s and t independently lie in the range of from 0 to 8, the value of b lies in the range from 0 to 20, and the values of a, u and v independently are either 0 or 1 with the proviso that at least one of u or v must be 1; and wherein M is a counter anion.

Preferably  $R_2$ ,  $R_3$  and  $R_4$  are independently selected from  $CH_3$  and  $-CH_2CH_2OH$ .

Preferably M is selected from the group consisting of halide, methyl sulfate, sulfate, and nitrate, more preferably methyl sulfate, chloride, bromide or iodide.

Preferred water dispersible cationic ester surfactants are the choline esters having the formula:



wherein  $R_1$  is a  $C_{11}$ - $C_{19}$  linear or branched alkyl chain.


Particularly preferred choline esters of this type include the stearoyl choline ester quaternary methylammonium halides ( $R^1=C_{17}$  alkyl), palmitoyl choline ester quaternary methylammonium halides ( $R^1=C_{15}$  alkyl), myristoyl choline ester quaternary methylammonium halides ( $R^1=C_{13}$  alkyl), lauroyl choline ester quaternary methylammonium halides ( $R^1=C_{11}$  alkyl), cocoyl choline ester quaternary methylammonium halides ( $R^1=C_{11}$ - $C_{13}$  alkyl), tallowyl

choline ester quaternary methylammonium halides ( $R^1 = C_{15}-C_{17}$  alkyl), and any mixtures thereof.

The particularly preferred choline esters, given above, may be prepared by the direct esterification of a fatty acid of the desired chain length with dimethylaminoethanol, in the presence of an acid catalyst. The reaction product is then quaternized with a methyl halide, preferably in the presence of a solvent such as ethanol, propylene glycol or preferably a fatty alcohol ethoxylate such as  $C_{10}-C_{18}$  fatty alcohol ethoxylate having a degree of ethoxylation of from 3 to 50 ethoxy groups per mole forming the desired cationic material. They may also be prepared by the direct esterification of a long chain fatty acid of the desired chain length together with 2-haloethanol, in the presence of an acid catalyst material. The reaction product is then quaternized with trimethylamine, forming the desired cationic material.

In a preferred aspect these cationic ester surfactant are hydrolysable under the conditions of a laundry wash method.

Cationic co-surfactants useful herein also include alkoxyated quaternary ammonium (AQA) surfactant compounds (referred to hereinafter as "AQA compounds") having the formula:

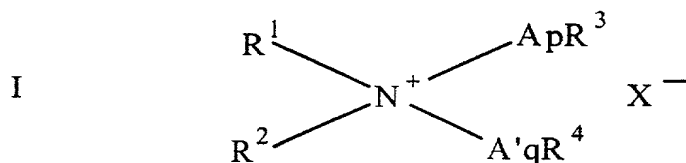

wherein  $R^1$  is an alkyl or alkenyl moiety containing from about 8 to about 18 carbon atoms, preferably 10 to about 16 carbon atoms, most preferably from about 10 to about 14 carbon atoms;  $R^2$  is an alkyl group containing from one to three carbon atoms, preferably methyl;  $R^3$  and  $R^4$  can vary independently and are selected from hydrogen (preferred), methyl and ethyl;  $X^-$  is an anion such as chloride, bromide, methylsulfate, sulfate, or the like, sufficient to provide electrical neutrality. A and A' can vary independently and are each selected from  $C_1-C_4$  alkoxy, especially ethoxy (i.e.,  $-CH_2CH_2O-$ ), propoxy, butoxy and mixed ethoxy/propoxy; p is from 0 to about 30, preferably 1 to about 4 and q is from 0 to about 30, preferably 1 to about 4, and most preferably to about 4; preferably both p and q are 1. See also: EP 2,084, published May 30, 1979, by The Procter & Gamble Company, which describes cationic co-surfactants of this type which are also useful herein..

The levels of the AQA surfactants used to prepare finished laundry detergent compositions typically range from about 0.1% to about 5%, preferably from about 0.45% to about 2.5%, by weight.

Heavy duty liquid detergent compositions herein, especially those designed for fabric laundering, may also comprise a non-aqueous carrier medium as described in more detail hereinafter.

#### SHAMPOO COMPOSITIONS:

5       The shampoo compositions of the present invention typically can comprise the following ingredients, components, or limitations described herein. As used herein, "water soluble" refers to any material that is sufficiently soluble in water to form a substantially clear solution to the naked eye at a concentration of 0.1% in water, i.e. distilled or equivalent, at 25°C.

10       The shampoo compositions of the present invention contain a shampoo composition adjunct ingredient which is preferably selected from anti-dandruff agents (preferably platelet pyridinethione salt crystals, sulfur, octopirox, selenium sulfide, ketoconazole and pyridinethione salts), co-surfactants (preferably selected from anionic surfactant, nonionic surfactant, cationic surfactant, amphoteric surfactant, zwitterionic surfactants, and mixtures thereof), silicone hair conditioning agent, polyalkylene glycols, suspending agent, water, water soluble cationic  
15       polymeric conditioning agents, hydrocarbon conditioning agents, foam boosters, preservatives, thickeners, cosurfactants, dyes, perfumes, solvents, styling polymers, anti-static agents, deposition polymers, styling polymers and solvent, dispersed phase polymers, non-volatile hydrocarbons conditioning agents, silicone conditioning agents, suspending agent, cationic spreading agents phase separation initiators and pediculocides and mixtures thereof. These and  
20       other suitable materials for incorporation into the shampoo compositions of the present invention can be found in U.S. Patent applications Serial Nos. 60/061,975 filed on October 17, 1997 (Docket No. 6882P), and 60/061,916 filed on October 17, 1997 (Docket No. 6884P).

#### LDL compositions

25       The compositions of the present invention can also be in the form of LDL compositions. These LDL compositions include additives typically used in LDL formulations, such as diamines, divalent ions, suds boosting polymers, soil release polymers, polymeric dispersants, polysaccharides, abrasives, bactericides, tarnish inhibitors, builders, enzymes, dyes, perfumes, thickeners, antioxidants, processing aids, suds boosters, buffers, antifungal or mildew control agents, insect repellants, anti-corrosive aids, and chelants.

30       Diamines - Since the habits and practices of the users of detergent compositions show considerable variation, the composition will preferably contain at least about 0.1%, more preferably at least about 0.2%, even more preferably, at least about 0.25%, even more preferably still, at least about 0.5% by weight of said composition of diamine. The composition will also preferably contain no more than about 15%, more preferably no more than about 10%, even more


preferably, no more than about 6%, even more preferably, no more than about 5%, even more preferably still, no more than about 1.5% by weight of said composition of diamine.

It is further preferred that the compositions of the present invention be "malodor" free. That is, that the odor of the headspace does not generate a negative olfactory response from the consumer.

Preferred organic diamines are those in which pK1 and pK2 are in the range of about 8.0 to about 11.5, preferably in the range of about 8.4 to about 11, even more preferably from about 8.6 to about 10.75. Preferred materials for performance and supply considerations are 1,3-bis(methylamine)-cyclohexane, 1,3 propane diamine (pK1=10.5; pK2=8.8), 1,6 hexane diamine (pK1=11; pK2=10), 1,3 pentane diamine (Dytek EP) (pK1=10.5; pK2=8.9), 2-methyl 1,5 pentane diamine (Dytek A) (pK1=11.2; pK2=10.0). Other preferred materials are the primary/primary diamines with alkylene spacers ranging from C4 to C8. In general, it is believed that primary diamines are preferred over secondary and tertiary diamines.


Definition of pK1 and pK2 - As used herein, "pKa1" and "pKa2" are quantities of a type collectively known to those skilled in the art as "pKa" pKa is used herein in the same manner as is commonly known to people skilled in the art of chemistry. Values referenced herein can be obtained from literature, such as from "Critical Stability Constants: Volume 2, Amines" by Smith and Martel, Plenum Press, NY and London, 1975. Additional information on pKa's can be obtained from relevant company literature, such as information supplied by Dupont, a supplier of diamines. More detailed information of pKa's can be found in US Pat App No.

The diamines useful herein can be defined by the following structure:




wherein R<sub>2-5</sub> are independently selected from H, methyl, -CH<sub>3</sub>CH<sub>2</sub>, and ethylene oxides; C<sub>x</sub> and C<sub>y</sub> are independently selected from methylene groups or branched alkyl groups where x+y is from about 3 to about 6; and A is optionally present and is selected from electron donating or withdrawing moieties chosen to adjust the diamine pKa's to the desired range. If A is present, then x and y must both be 1 or greater.

Alternatively the preferred diamines can be those with a molecular weight less than or equal to 400 g/mol. It is preferred that these diamines have the formula:




wherein each  $\text{R}^6$  is independently selected from the group consisting of hydrogen,  $\text{C}_1$ - $\text{C}_4$  linear or branched alkyl, alkyleneoxy having the formula:



wherein  $\text{R}^7$  is  $\text{C}_2$ - $\text{C}_4$  linear or branched alkylene, and mixtures thereof;  $\text{R}^8$  is hydrogen,  $\text{C}_1$ - $\text{C}_4$  alkyl, and mixtures thereof;  $m$  is from 1 to about 10;  $\text{X}$  is a unit selected from:

- i)  $\text{C}_3$ - $\text{C}_{10}$  linear alkylene,  $\text{C}_3$ - $\text{C}_{10}$  branched alkylene,  $\text{C}_3$ - $\text{C}_{10}$  cyclic alkylene,  $\text{C}_3$ - $\text{C}_{10}$  branched cyclic alkylene, an alkyleneoxyalkylene having the formula:



wherein  $\text{R}^7$  and  $m$  are the same as defined herein above;

- ii)  $\text{C}_3$ - $\text{C}_{10}$  linear,  $\text{C}_3$ - $\text{C}_{10}$  branched linear,  $\text{C}_3$ - $\text{C}_{10}$  cyclic,  $\text{C}_3$ - $\text{C}_{10}$  branched cyclic alkylene,  $\text{C}_6$ - $\text{C}_{10}$  arylene, wherein said unit comprises one or more electron donating or electron withdrawing moieties which provide said diamine with a  $\text{pK}_a$  greater than about 8; and

- iii) mixtures of (i) and (ii)


provided said diamine has a  $\text{pK}_a$  of at least about 8.

Examples of preferred diamines include the following:

dimethyl aminopropyl amine, 1,6-hexane diamine, 1,3 propane diamine, 2-methyl 1,5 pentane diamine, 1,3-Pentanediamine, 1,3-diaminobutane, 1,2-bis(2-aminoethoxy)ethane, Isophorone diamine, 1,3-bis(methylamine)-cyclohexane and mixtures thereof.


**Polymeric Suds Stabilizer** - The compositions of the present invention may optionally contain a polymeric suds stabilizer. These polymeric suds stabilizers provide extended suds volume and suds duration without sacrificing the grease cutting ability of the liquid detergent compositions. These polymeric suds stabilizers are selected from:

- i) homopolymers of (N,N-dialkylamino)alkyl acrylate esters having the formula:




wherein each R is independently hydrogen, C<sub>1</sub>-C<sub>8</sub> alkyl, and mixtures thereof, R<sup>1</sup> is hydrogen, C<sub>1</sub>-C<sub>6</sub> alkyl, and mixtures thereof, n is from 2 to about 6; and

ii) copolymers of (i) and



wherein R<sup>1</sup> is hydrogen, C<sub>1</sub>-C<sub>6</sub> alkyl, and mixtures thereof, provided that the ratio of (ii) to (i) is from about 2 to 1 to about 1 to 2; The molecular weight of the polymeric suds boosters, determined via conventional gel permeation chromatography, is from about 1,000 to about 2,000,000, preferably from about 5,000 to about 1,000,000, more preferably from about 10,000 to about 750,000, more preferably from about 20,000 to about 500,000, even more preferably from about 35,000 to about 200,000. The polymeric suds stabilizer can optionally be present in the form of a salt, either an inorganic or organic salt, for example the citrate, sulfate, or nitrate salt of (N,N-dimethylamino)alkyl acrylate ester.

One preferred polymeric suds stabilizer is (N,N-dimethylamino)alkyl acrylate esters, namely



When present in the compositions, the polymeric suds booster may be present in the composition from about 0.01% to about 15%, preferably from about 0.05% to about 10%, more preferably from about 0.1% to about 5%, by weight.

Other suitable polymeric suds stabilizers, including protenacious suds stabilizers and zwitterionic suds stabilizers, can be found in PCT/US98/24853 filed November 20, 1998 (Docket No. 6938), PCT/US98/24707 filed November 20, 1998 (Docket No. 6939), PCT/US98/24699 filed November 20, 1998 (Docket No. 6943), and PCT/US98/24852 filed November 20,

1998(Docket No. 6944). Also suitable are the cationic copolymer stabilizers, which can be found in US Patent 4454060.

Enzymes - Detergent compositions of the present invention may further comprise one or more enzymes which provide cleaning performance benefits. Said enzymes include enzymes selected from cellulases, hemicellulases, peroxidases, proteases, gluco-amylases, amylases, lipases, cutinases, pectinases, xylanases, reductases, oxidases, phenoloxidases, lipoxigenases, ligninases, pullulanases, tannases, pentosanases, malanases,  $\beta$ -glucanases, arabinosidases or mixtures thereof. A preferred combination is a detergent composition having a cocktail of conventional applicable enzymes like protease, amylase, lipase, cutinase and/or cellulase. Enzymes when present in the compositions, at from about 0.0001% to about 5% of active enzyme by weight of the detergent composition.

Proteolytic Enzyme - The proteolytic enzyme can be of animal, vegetable or microorganism (preferred) origin. The proteases for use in the detergent compositions herein include (but are not limited to) trypsin, subtilisin, chymotrypsin and elastase-type proteases. Preferred for use herein are subtilisin-type proteolytic enzymes. Particularly preferred is bacterial serine proteolytic enzyme obtained from Bacillus subtilis and/or Bacillus licheniformis.

Suitable proteolytic enzymes include Novo Industri A/S Alcalase<sup>®</sup> (preferred), Esperase<sup>®</sup>, Savinase<sup>®</sup> (Copenhagen, Denmark), Gist-brocades' Maxatase<sup>®</sup>, Maxacal<sup>®</sup> and Maxapem 15<sup>®</sup> (protein engineered Maxacal<sup>®</sup>) (Delft, Netherlands), and subtilisin BPN and BPN'(preferred), which are commercially available. Preferred proteolytic enzymes are also modified bacterial serine proteases, such as those made by Genencor International, Inc. (San Francisco, California) which are described in European Patent 251,446B, granted December 28, 1994 (particularly pages 17, 24 and 98) and which are also called herein "Protease B". U.S. Patent 5,030,378, Venegas, issued July 9, 1991, refers to a modified bacterial serine proteolytic enzyme (Genencor International) which is called "Protease A" herein (same as BPN'). In particular see columns 2 and 3 of U.S. Patent 5,030,378 for a complete description, including amino sequence, of Protease A and its variants. Other proteases are sold under the tradenames: Primase, Durazym, Opticlean and Optimase. Preferred proteolytic enzymes, then, are selected from the group consisting of Alcalase<sup>®</sup> (Novo Industri A/S), BPN', Protease A and Protease B (Genencor), and mixtures thereof. Protease B is most preferred.

Of particular interest for use herein are the proteases described in U.S. Patent No. 5,470,733.

Also proteases described in our co-pending application USSN 08/136,797 can be included in the detergent composition of the invention.

Another preferred protease, referred to as "Protease D" is a carbonyl hydrolase variant having an amino acid sequence not found in nature, which is derived from a precursor carbonyl hydrolase by substituting a different amino acid for a plurality of amino acid residues at a position in said carbonyl hydrolase equivalent to position +76, preferably also in combination with one or more amino acid residue positions equivalent to those selected from the group consisting of +99, +101, +103, +104, +107, +123, +27, +105, +109, +126, +128, +135, +156, +166, +195, +197, +204, +206, +210, +216, +217, +218, +222, +260, +265, and/or +274 according to the numbering of *Bacillus amyloliquefaciens* subtilisin, as described in WO 95/10615 published April 20, 1995 by Genencor International (A. Baeck et al. entitled "Protease-Containing Cleaning Compositions" having U.S. Serial No. 08/322,676, filed October 13, 1994).

Useful proteases are also described in PCT publications: WO 95/30010 published November 9, 1995 by The Procter & Gamble Company; WO 95/30011 published November 9, 1995 by The Procter & Gamble Company; WO 95/29979 published November 9, 1995 by The Procter & Gamble Company.

Protease enzyme may be incorporated into the compositions in accordance with the invention at a level of from 0.0001% to 2% active enzyme by weight of the composition.

Amylase - Amylases ( $\alpha$  and/or  $\beta$ ) can be included for removal of carbohydrate-based stains. Suitable amylases are Termamyl® (Novo Nordisk), Fungamyl® and BAN® (Novo Nordisk). The enzymes may be of any suitable origin, such as vegetable, animal, bacterial, fungal and yeast origin. Amylase enzymes are normally incorporated in the detergent composition at levels from 0.0001% to 2%, preferably from about 0.0001% to about 0.5%, more preferably from about 0.0005% to about 0.1%, even more preferably from about 0.001% to about 0.05% of active enzyme by weight of the detergent composition.

Amylase enzymes also include those described in WO95/26397 and in co-pending application by Novo Nordisk PCT/DK96/00056.

One suitable amylase enzyme is NATALASE® available from Novo Nordisk.

Other amylases suitable herein include, for example,  $\alpha$ -amylases described in GB 1,296,839 to Novo; RAPIDASE®, International Bio-Synthetics, Inc. and TERMAMYL®, Novo. FUNGAMYL® from Novo is especially useful.

Particularly preferred amylases herein include amylase variants having additional modification in the immediate parent as described in WO 9510603 A and are available from the assignee, Novo, as DURAMYL®. Other particularly preferred oxidative stability enhanced amylase include those described in WO 9418314 to Genencor International and WO 9402597 to Novo. Any other oxidative stability-enhanced amylase can be used, for example as derived by



site-directed mutagenesis from known chimeric, hybrid or simple mutant parent forms of available amylases. Other preferred enzyme modifications are accessible. See WO 9509909 A to Novo.

Various carbohydrase enzymes which impart antimicrobial activity may also be included  
5 in the present invention. Such enzymes include endoglycosidase, Type II endoglycosidase and glucosidase as disclosed in U.S. Patent Nos. 5,041,236, 5,395,541, 5,238,843 and 5,356,803 the disclosures of which are herein incorporated by reference. Of course, other enzymes having antimicrobial activity may be employed as well including peroxidases, oxidases and various other enzymes.

10 It is also possible to include an enzyme stabilization system into the compositions of the present invention when any enzyme is present in the composition.

Various carbohydrase enzymes which impart antimicrobial activity may also be included  
15 in the present invention. Such enzymes include endoglycosidase, Type II endoglycosidase and glucosidase as disclosed in U.S. Patent Nos. 5,041,236, 5,395,541, 5,238,843 and 5,356,803 the disclosures of which are herein incorporated by reference. Of course, other enzymes having antimicrobial activity may be employed as well including peroxidases, oxidases and various other enzymes.

It is also possible to include an enzyme stabilization system into the compositions of the present invention when any enzyme is present in the composition.

20 Peroxidase enzymes can be used in combination with oxygen sources, e.g., percarbonate, perborate, persulfate, hydrogen peroxide, etc. They are typically used for "solution bleaching," i.e. to prevent transfer of dyes or pigments removed from substrates during wash operations to other substrates in the wash solution. Peroxidase enzymes are known in the art, and include, for example, horseradish peroxidase, ligninase, and haloperoxidase such as chloro- and bromo-  
25 peroxidase. Peroxidase-containing detergent compositions are disclosed, for example, in PCT International Application WO 89/099813, published October 19, 1989, by O. Kirk, assigned to Novo Industries A/S. The present invention encompasses peroxidase-free automatic dishwashing composition embodiments.

A wide range of enzyme materials and means for their incorporation into synthetic  
30 detergent compositions are also disclosed in U.S. Patent 3,553,139, issued January 5, 1971 to McCarty et al. Enzymes are further disclosed in U.S. Patent 4,101,457, Place et al, issued July 18, 1978, and in U.S. Patent 4,507,219, Hughes, issued March 26, 1985. Enzymes for use in detergents can be stabilized by various techniques. Enzyme stabilization techniques are disclosed and exemplified in U.S. Patent 3,600,319, issued August 17, 1971 to Gedge, et al, and European

Patent Application Publication No. 0 199 405, Application No. 86200586.5, published October 29, 1986, Venegas. Enzyme stabilization systems are also described, for example, in U.S. Patent 3,519,570.

5 The enzymes may be incorporated into detergent compositions herein in the form of suspensions, "marumes" or "prills". Another suitable type of enzyme comprises those in the form of slurries of enzymes in nonionic surfactants, e.g., the enzymes marketed by Novo Nordisk under the tradename "SL" or the microencapsulated enzymes marketed by Novo Nordisk under the tradename "LDP."

10 Enzymes added to the compositions herein in the form of conventional enzyme prills are especially preferred for use herein. Such prills will generally range in size from about 100 to 1,000 microns, more preferably from about 200 to 800 microns and will be suspended throughout the non-aqueous liquid phase of the composition. Prills in the compositions of the present invention have been found, in comparison with other enzyme forms, to exhibit especially desirable enzyme stability in terms of retention of enzymatic activity over time. Thus,  
15 compositions which utilize enzyme prills need not contain conventional enzyme stabilizing such as must frequently be used when enzymes are incorporated into aqueous liquid detergents.

If employed, enzymes will normally be incorporated into the non-aqueous liquid compositions herein at levels sufficient to provide up to about 10 mg by weight, more typically from about 0.01 mg to about 5 mg, of active enzyme per gram of the composition. Stated  
20 otherwise, the non-aqueous liquid detergent compositions herein will typically comprise from about 0.001% to 5%, preferably from about 0.01% to 1% by weight, of a commercial enzyme preparation. Protease enzymes, for example, are usually present in such commercial preparations at levels sufficient to provide from 0.005 to 0.1 Anson units (AU) of activity per gram of composition.

25 Enzyme Stabilizing System - The enzyme-containing compositions herein may optionally also comprise from about 0.001% to about 10%, preferably from about 0.005% to about 8%, most preferably from about 0.01% to about 6%, by weight of an enzyme stabilizing system. The enzyme stabilizing system can be any stabilizing system which is compatible with the deterative enzyme. Such a system may be inherently provided by other formulation actives, or be added  
30 separately, e.g., by the formulator or by a manufacturer of detergent-ready enzymes. Such stabilizing systems can, for example, comprise calcium ion, boric acid, propylene glycol, short chain carboxylic acids, boronic acids, and mixtures thereof, and are designed to address different stabilization problems depending on the type and physical form of the detergent composition.

Perfumes - Perfumes and perfumery ingredients useful in the present compositions and processes comprise a wide variety of natural and synthetic chemical ingredients, including, but not limited to, aldehydes, ketones, esters, and the like. Also included are various natural extracts and essences which can comprise complex mixtures of ingredients, such as orange oil, lemon oil, rose extract, lavender, musk, patchouli, balsamic essence, sandalwood oil, pine oil, cedar, and the like. Finished perfumes can comprise extremely complex mixtures of such ingredients. Finished perfumes typically comprise from about 0.01% to about 2%, by weight, of the detergent compositions herein, and individual perfumery ingredients can comprise from about 0.0001% to about 90% of a finished perfume composition.

Chelating Agents - The detergent compositions herein may also optionally contain one or more iron and/or manganese chelating agents. Such chelating agents can be selected from the group consisting of amino carboxylates, amino phosphonates, polyfunctionally-substituted aromatic chelating agents and mixtures therein, all as hereinafter defined. Without intending to be bound by theory, it is believed that the benefit of these materials is due in part to their exceptional ability to remove iron and manganese ions from washing solutions by formation of soluble chelates.

Amino carboxylates useful as optional chelating agents include ethylenediaminetetracetates, N-hydroxyethylethylenediaminetriacetates, nitrilo-tri-acetates, ethylenediamine tetrapro-prionates, triethylenetetraaminehexacetates, diethylenetriamine-pentaacetates, and ethanoldiglycines, alkali metal, ammonium, and substituted ammonium salts therein and mixtures therein.

Amino phosphonates are also suitable for use as chelating agents in the compositions of the invention when at least low levels of total phosphorus are permitted in detergent compositions, and include ethylenediaminetetrakis (methylenephosphonates) as DEQUEST. Preferred, these amino phosphonates do not contain alkyl or alkenyl groups with more than about 6 carbon atoms.

Polyfunctionally-substituted aromatic chelating agents are also useful in the compositions herein. See U.S. Patent 3,812,044, issued May 21, 1974, to Connor et al. Preferred compounds of this type in acid form are dihydroxydisulfobenzenes such as 1,2-dihydroxy-3,5-disulfobenzene.

A preferred biodegradable chelator for use herein is ethylenediamine disuccinate ("EDDS"), especially the [S,S] isomer as described in U.S. Patent 4,704,233, November 3, 1987, to Hartman and Perkins.

The compositions herein may also contain water-soluble methyl glycine diacetic acid (MGDA) salts (or acid form) as a chelant or co-builder. Similarly, the so called "weak" builders such as citrate can also be used as chelating agents.

If utilized, these chelating agents will generally comprise from about 0.1% to about 15% by weight of the detergent compositions herein. More preferably, if utilized, the chelating agents will comprise from about 0.1% to about 3.0% by weight of such compositions.

#### Composition pH

The compositions of the invention will be subjected to acidic stresses created by food soils when put to use, i.e., diluted and applied to soiled dishes. If a composition with a pH greater than 7 is to be more effective, it preferably should contain a buffering agent capable of providing a generally more alkaline pH in the composition and in dilute solutions, i.e., about 0.1% to 0.4% by weight aqueous solution, of the composition. The pKa value of this buffering agent should be about 0.5 to 1.0 pH units below the desired pH value of the composition (determined as described above). Preferably, the pKa of the buffering agent should be from about 7 to about 10. Under these conditions the buffering agent most effectively controls the pH while using the least amount thereof.

The buffering agent may be an active detergent in its own right, or it may be a low molecular weight, organic or inorganic material that is used in this composition solely for maintaining an alkaline pH. Preferred buffering agents for compositions of this invention are nitrogen-containing materials. Some examples are amino acids such as lysine or lower alcohol amines like mono-, di-, and tri-ethanolamine. Other preferred nitrogen-containing buffering agents are Tri(hydroxymethyl)amino methane (HOCH<sub>2</sub>)<sub>3</sub>CNH<sub>3</sub> (TRIS), 2-amino-2-ethyl-1,3-propanediol, 2-amino-2-methyl-propanol, 2-amino-2-methyl-1,3-propanol, disodium glutamate, N-methyl diethanolamide, 1,3-diamino-propanol N,N'-tetra-methyl-1,3-diamino-2-propanol, N,N-bis(2-hydroxyethyl)glycine (bicine) and N-tris (hydroxymethyl)methyl glycine (tricine). Mixtures of any of the above are also acceptable. Useful inorganic buffers/alkalinity sources include the alkali metal carbonates and alkali metal phosphates, e.g., sodium carbonate, sodium polyphosphate. For additional buffers see McCutcheon's EMULSIFIERS AND DETERGENTS, North American Edition, 1997, McCutcheon Division, MC Publishing Company Kirk and WO 95/07971 both of which are incorporated herein by reference.

The buffering agent, if used, is present in the compositions of the invention herein at a level of from about 0.1% to 15%, preferably from about 1% to 10%, most preferably from about 2% to 8%, by weight of the composition.

#### Bleaching Compounds

Bleaching Agents and Bleach Activators The granular detergent compositions herein preferably further contain a bleach and/or a bleach activators. The granular bleaching detergent compositions herein will contain a bleach and a bleach activator. Bleaches agents will typically, when present, be at levels of from about 1% to about 30%, more typically from about 5% to about 20%, of the detergent composition, especially for fabric laundering. If present, the amount of bleach activators will typically be from about 0.1% to about 60%, more typically from about 0.5% to about 40% of the bleaching composition comprising the bleaching agent-plus-bleach activator.

The bleaches used herein can be any of the bleaches useful for detergent compositions in textile cleaning, hard surface cleaning, or other cleaning purposes that are now known or become known. These include oxygen bleaches as well as other bleaching agents. Perborate bleaches, e.g., sodium perborate (e.g., mono- or tetra-hydrate) can be used herein.

Another category of bleaches that can be used without restriction encompasses percarboxylic acid bleaching agents and salts thereof. Suitable examples of this class of agents include magnesium monoperoxyphthalate hexahydrate, the magnesium salt of metachloro perbenzoic acid, 4-nonylamino-4-oxoperoxybutyric acid and diperoxydodecanedioic acid. Such bleaches are disclosed in U.S. Patent 4,483,781, Hartman, issued November 20, 1984, U.S. Patent Application 740,446, Burns et al, filed June 3, 1985, European Patent Application 0,133,354, Banks et al, published February 20, 1985, and U.S. Patent 4,412,934, Chung et al, issued November 1, 1983. Highly preferred bleaches also include 6-nonylamino-6-oxoperoxycaproic acid as described in U.S. Patent 4,634,551, issued January 6, 1987 to Burns et al.

Peroxygen bleaches can also be used. Suitable peroxygen bleaching compounds include sodium carbonate peroxyhydrate and equivalent "percarbonate" bleaches, sodium pyrophosphate peroxyhydrate, urea peroxyhydrate, and sodium peroxide. Persulfate bleach (e.g., OXONE, manufactured commercially by DuPont) can also be used.

A preferred percarbonate bleach comprises dry particles having an average particle size in the range from about 500 micrometers to about 1,000 micrometers, not more than about 10% by weight of said particles being smaller than about 200 micrometers and not more than about 10% by weight of said particles being larger than about 1,250 micrometers. Optionally, the percarbonate can be coated with silicate, borate or water-soluble surfactants. Percarbonate is available from various commercial sources such as FMC, Solvay and Tokai Denka.

Mixtures of bleaches can also be used.

Peroxygen bleaches, the perborates, the percarbonates, etc., are preferably combined with bleach activators, which lead to the in situ production in aqueous solution (i.e., during the

washing process) of the peroxy acid corresponding to the bleach activator. Various nonlimiting examples of activators are disclosed in U.S. Patent 4,915,854, issued April 10, 1990 to Mao et al, and U.S. Patent 4,412,934. The nonanoyloxybenzene sulfonate (NOBS) and tetraacetyl ethylene diamine (TAED) activators are typical, and mixtures thereof can also be used. See also U.S. 4,634,551 for other typical bleaches and activators useful herein.

#### Bleach Activators

Bleach activators useful herein include amides, imides, esters and anhydrides. Commonly at least one substituted or unsubstituted acyl moiety is present, covalently connected to a leaving group as in the structure  $R-C(O)-L$ . In one preferred mode of use, bleach activators are combined with a source of hydrogen peroxide, such as the perborates or percarbonates, in a single product. Conveniently, the single product leads to in situ production in aqueous solution (i.e., during the washing process) of the percarboxylic acid corresponding to the bleach activator. The product itself can be hydrous, for example a powder, provided that water is controlled in amount and mobility such that storage stability is acceptable. Alternately, the product can be an anhydrous solid or liquid. In another mode, the bleach activator or oxygen bleach is incorporated in a pretreatment product, such as a stain stick; soiled, pretreated substrates can then be exposed to further treatments, for example of a hydrogen peroxide source. With respect to the above bleach activator structure  $RC(O)L$ , the atom in the leaving group connecting to the peracid-forming acyl moiety  $R(C)O-$  is most typically O or N. Bleach activators can have non-charged, positively or negatively charged peracid-forming moieties and/or noncharged, positively or negatively charged leaving groups. One or more peracid-forming moieties or leaving-groups can be present. See, for example, U.S. 5,595,967, U.S. 5,561,235, U.S. 5,560,862 or the bis-(peroxy-carbonic) system of U.S. 5,534,179. Mixtures of suitable bleach activators can also be used. Bleach activators can be substituted with electron-donating or electron-releasing moieties either in the leaving-group or in the peracid-forming moiety or moieties, changing their reactivity and making them more or less suited to particular pH or wash conditions. For example, electron-withdrawing groups such as  $NO_2$  improve the efficacy of bleach activators intended for use in mild-pH (e.g., from about 7.5- to about 9.5) wash conditions.

An extensive and exhaustive disclosure of suitable bleach activators and suitable leaving groups, as well as how to determine suitable activators, can be found in US Patents 5,686,014 and 5,622,646.

Cationic bleach activators include quaternary carbamate-, quaternary carbonate-, quaternary ester- and quaternary amide- types, delivering a range of cationic peroxyimidic,

peroxycarbonic or peroxycarboxylic acids to the wash. An analogous but non-cationic palette of bleach activators is available when quaternary derivatives are not desired. In more detail, cationic activators include quaternary ammonium-substituted activators of WO 96-06915, U.S. 4,751,015 and 4,397,757, EP-A-284292, EP-A-331,229 and EP-A-03520. Also useful are  
5 cationic nitriles as disclosed in EP-A-303,520 and in European Patent Specification 458,396 and 464,880. Other nitrile types have electron-withdrawing substituents as described in U.S. 5,591,378.

Other bleach activator disclosures include GB 836,988; 864,798; 907,356; 1,003,310 and 1,519,351; German Patent 3,337,921; EP-A-0185522; EP-A-0174132; EP-A-0120591; U.S.  
10 Pat. Nos. 1,246,339; 3,332,882; 4,128,494; 4,412,934 and 4,675,393, and the phenol sulfonate ester of alkanoyl aminoacids disclosed in U.S. 5,523,434. Suitable bleach activators include any acetylated diamine types, whether hydrophilic or hydrophobic in character.

Of the above classes of bleach precursors, preferred classes include the esters, including acyl phenol sulfonates, acyl alkyl phenol sulfonates or acyl oxybenzenesulfonates (OBS leaving-  
15 group); the acyl-amides; and the quaternary ammonium substituted peroxyacid precursors including the cationic nitriles.

Preferred bleach activators include N,N,N'-tetraacetyl ethylene diamine (TAED) or any of its close relatives including the triacetyl or other unsymmetrical derivatives. TAED and the acetylated carbohydrates such as glucose pentaacetate and tetraacetyl xylose are preferred  
20 hydrophilic bleach activators. Depending on the application, acetyl triethyl citrate, a liquid, also has some utility, as does phenyl benzoate.

Preferred hydrophobic bleach activators include sodium nonanoyloxybenzene sulfonate (NOBS or SNOBS), N-(alkanoyl)aminoalkanoyloxy benzene sulfonates, such as 4-[N-(nonanoyl)aminohexanoyloxy]-benzene sulfonate or (NACA-OBS) as described in US Patent  
25 5,534,642 and in EPA 0 355 384 A1, substituted amide types described in detail hereinafter, such as activators related to NAPAA, and activators related to certain imidoperacid bleaches, for example as described in U.S. Patent 5,061,807, issued October 29, 1991 and assigned to Hoechst Aktiengesellschaft of Frankfurt, Germany and Japanese Laid-Open Patent Application (Kokai) No. 4-28799.


30 Another group of peracids and bleach activators herein are those derivable from acyclic imidoperoxycarboxylic acids and salts thereof, See US Patent 5,415,796, and cyclic imidoperoxycarboxylic acids and salts thereof, see US patents 5,061,807, 5,132,431, 5,654,629, 5,246,620, 5,419,864 and 5,438,147.

Other suitable bleach activators include sodium-4-benzoyloxy benzene sulfonate (SBOBS); sodium-1-methyl-2-benzoyloxy benzene-4-sulphonate; sodium-4-methyl-3-benzoyloxy benzoate (SPCC); trimethyl ammonium toluoyloxy-benzene sulfonate; or sodium 3,5,5-trimethyl hexanoyloxybenzene sulfonate (STHOBS).

5 Bleach activators may be used in an amount of up to 20%, preferably from 0.1-10% by weight, of the composition, though higher levels, 40% or more, are acceptable, for example in highly concentrated bleach additive product forms or forms intended for appliance automated dosing.

Highly preferred bleach activators useful herein are amide-substituted and an extensive  
10 and exhaustive disclosure of these activators can be found in US Patents 5,686,014 and 5,622,646.

Other useful activators, disclosed in U.S. 4,966,723, are benzoxazin-type, such as a C<sub>6</sub>H<sub>4</sub> ring to which is fused in the 1,2-positions a moiety --C(O)OC(R<sup>1</sup>)=N-. A highly preferred activator of the benzoxazin-type is:



15 Depending on the activator and precise application, good bleaching results can be obtained from bleaching systems having with in-use pH of from about 6 to about 13, preferably from about 9.0 to about 10.5. Typically, for example, activators with electron-withdrawing moieties are used for near-neutral or sub-neutral pH ranges. Alkalis and buffering  
20 agents can be used to secure such pH.

Acyl lactam activators are very useful herein, especially the acyl caprolactams (see for example WO 94-28102 A) and acyl valerolactams (see U.S. 5,503,639). See also U.S. 4,545,784 which discloses acyl caprolactams, including benzoyl caprolactam adsorbed into sodium perborate. In certain preferred embodiments of the invention, NOBS, lactam activators,  
25 imide activators or amide-functional activators, especially the more hydrophobic derivatives, are desirably combined with hydrophilic activators such as TAED, typically at weight ratios of hydrophobic activator : TAED in the range of 1:5 to 5:1, preferably about 1:1. Other suitable lactam activators are alpha-modified; see WO 96-22350 A1, July 25, 1996. Lactam activators, especially the more hydrophobic types, are desirably used in combination with TAED,  
30 typically at weight ratios of amido-derived or caprolactam activators : TAED in the range of



1:5 to 5:1, preferably about 1:1. See also the bleach activators having cyclic amidine leaving-group disclosed in U.S. 5,552,556.

Nonlimiting examples of additional activators useful herein are to be found in U.S. 4,915,854, U.S. 4,412,934 and 4,634,551. The hydrophobic activator nonanoyloxybenzene sulfonate (NOBS) and the hydrophilic tetraacetyl ethylene diamine (TAED) activator are typical, and mixtures thereof can also be used.

Additional activators useful herein include those of U.S. 5,545,349, which is also incorporated herein by reference.


Bleaches other than oxygen bleaching agents are also known in the art and can be utilized herein. One type of non-oxygen bleaching agent of particular interest includes photoactivated bleaches such as the sulfonated zinc and/or aluminum phthalocyanines. See U.S. Patent 4,033,718, issued July 5, 1977 to Holcombe et al. If used, detergent compositions will typically contain from about 0.025% to about 1.25%, by weight, of such bleaches, especially sulfonate zinc phthalocyanine.

#### 15 Bleach Catalysts

The present invention compositions and methods utilize metal-containing bleach catalysts that are effective for use in ADD compositions. Preferred are manganese and cobalt-containing bleach catalysts.

For examples of suitable bleach catalysts see U.S. Pat. Nos. 4,246,612, 5,804,542, 5,798,326, 5,246,621, 4,430,243, 5,244,594, 5,597,936, 5,705,464, 4,810,410, 4,601,845, 5,194,416, 5,703,030, 4,728,455, 4,711,748, 4,626,373, 4,119,557, 5,114,606, 5,599,781, 5,703,034, 5,114,611, 4,430,243, 4,728,455, and 5,227,084; EP Pat. Nos. 408,131, 549,271, 384,503, 549,272, 224,952, and 306,089; DE Pat. No. 2,054,019; CA Pat No. 866,191.


Preferred are cobalt (III) catalysts having the formula:



wherein cobalt is in the +3 oxidation state; n is an integer from 0 to 5 (preferably 4 or 5; most preferably 5); M' represents a monodentate ligand; m is an integer from 0 to 5 (preferably 1 or 2; most preferably 1); B' represents a bidentate ligand; b is an integer from 0 to 2; T' represents a tridentate ligand; t is 0 or 1; Q is a tetradentate ligand; q is 0 or 1; P is a pentadentate ligand; p is 0 or 1; and n + m + 2b + 3t + 4q + 5p = 6; Y is one or more appropriately selected counteranions present in a number y, where y is an integer from 1 to 3 (preferably 2 to 3; most preferably 2 when Y is a -1 charged anion), to obtain a charge-balanced salt, preferred Y are selected from the group consisting of chloride, iodide, I<sub>3</sub><sup>-</sup>, formate, nitrate, nitrite, sulfate, sulfite, citrate, acetate, carbonate, bromide, PF<sub>6</sub><sup>-</sup>, BF<sub>4</sub><sup>-</sup>, B(Ph)<sub>4</sub><sup>-</sup>, phosphate, phosphite, silicate, tosylate,

methanesulfonate, and combinations thereof [optionally, Y can be protonated if more than one anionic group exists in Y, e.g.,  $\text{HPO}_4^{2-}$ ,  $\text{HCO}_3^-$ ,  $\text{H}_2\text{PO}_4^-$ , etc., and further, Y may be selected from the group consisting of non-traditional inorganic anions such as anionic surfactants, e.g., linear alkylbenzene sulfonates (LAS), alkyl sulfates (AS), alkylethoxysulfonates (AES), etc., and/or anionic polymers, e.g., polyacrylates, polymethacrylates, etc.]; and wherein further at least one of the coordination sites attached to the cobalt is labile under automatic dishwashing use conditions and the remaining coordination sites stabilize the cobalt under automatic dishwashing conditions such that the reduction potential for cobalt (III) to cobalt (II) under alkaline conditions is less than about 0.4 volts (preferably less than about 0.2 volts) versus a normal hydrogen electrode.


Preferred cobalt catalysts of this type have the formula:



wherein n is an integer from 3 to 5 (preferably 4 or 5; most preferably 5); M' is a labile coordinating moiety, preferably selected from the group consisting of chlorine, bromine, hydroxide, water, and (when m is greater than 1) combinations thereof; m is an integer from 1 to 3 (preferably 1 or 2; most preferably 1);  $m+n = 6$ ; and Y is an appropriately selected counteranion present in a number y, which is an integer from 1 to 3 (preferably 2 to 3; most preferably 2 when Y is a -1 charged anion), to obtain a charge-balanced salt.

The preferred cobalt catalyst of this type useful herein are cobalt pentaamine chloride salts having the formula  $[\text{Co}(\text{NH}_3)_5\text{Cl}] \text{Y}_y$ , and especially  $[\text{Co}(\text{NH}_3)_5\text{Cl}]\text{Cl}_2$ .

More preferred are the present invention compositions which utilize cobalt (III) bleach catalysts having the formula:



wherein cobalt is in the +3 oxidation state; n is 4 or 5 (preferably 5); M is one or more ligands coordinated to the cobalt by one site; m is 0, 1 or 2 (preferably 1); B is a ligand coordinated to the cobalt by two sites; b is 0 or 1 (preferably 0), and when  $b=0$ , then  $m+n = 6$ , and when  $b=1$ , then  $m=0$  and  $n=4$ ; and T is one or more appropriately selected counteranions present in a number y, where y is an integer to obtain a charge-balanced salt (preferably y is 1 to 3; most preferably 2 when T is a -1 charged anion); and wherein further said catalyst has a base hydrolysis rate constant of less than  $0.23 \text{ M}^{-1} \text{ s}^{-1}$  ( $25^\circ\text{C}$ ).

The most preferred cobalt catalyst useful herein are cobalt pentaamine acetate salts having the formula  $[\text{Co}(\text{NH}_3)_5\text{OAc}] \text{T}_y$ , wherein OAc represents an acetate moiety, and especially cobalt pentaamine acetate chloride,  $[\text{Co}(\text{NH}_3)_5\text{OAc}]\text{Cl}_2$ ; as well as

[Co(NH<sub>3</sub>)<sub>5</sub>OAc](OAc)<sub>2</sub>; [Co(NH<sub>3</sub>)<sub>5</sub>OAc](PF<sub>6</sub>)<sub>2</sub>; [Co(NH<sub>3</sub>)<sub>5</sub>OAc](SO<sub>4</sub>); [Co(NH<sub>3</sub>)<sub>5</sub>OAc](BF<sub>4</sub>)<sub>2</sub>; and [Co(NH<sub>3</sub>)<sub>5</sub>OAc](NO<sub>3</sub>)<sub>2</sub>.

As a practical matter, and not by way of limitation, the cleaning compositions and cleaning processes herein can be adjusted to provide on the order of at least one part per hundred million of the active bleach catalyst species in the aqueous washing medium, and will preferably provide from about 0.01 ppm to about 25 ppm, more preferably from about 0.05 ppm to about 10 ppm, and most preferably from about 0.1 ppm to about 5 ppm, of the bleach catalyst species in the wash liquor. In order to obtain such levels in the wash liquor of an automatic dishwashing process, typical automatic dishwashing compositions herein will comprise from about 0.0005% to about 0.2%, more preferably from about 0.004% to about 0.08%, of bleach catalyst by weight of the cleaning compositions.

Builders - Builders can operate via a variety of mechanisms including forming soluble or insoluble complexes with hardness ions, by ion exchange, and by offering a surface more favorable to the precipitation of hardness ions than are the surfaces of articles to be cleaned. Builder level can vary widely depending upon end use and physical form of the composition. For example, high-surfactant formulations can be unbuilt. The level of builder can vary widely depending upon the end use of the composition and its desired physical form. The compositions will comprise at least about 0.1%, preferably from about 1% to about 90%, more preferably from about 5% to about 80%, even more preferably from about 10% to about 40% by weight, of the detergent builder. Lower or higher levels of builder, however, are not excluded.

Suitable builders herein can be selected from the group consisting of phosphates and polyphosphates, especially the sodium salts; carbonates, bicarbonates, sesquicarbonates and carbonate minerals other than sodium carbonate or sesquicarbonate; organic mono-, di-, tri-, and tetracarboxylates especially water-soluble nonsurfactant carboxylates in acid, sodium, potassium or alkanolammonium salt form, as well as oligomeric or water-soluble low molecular weight polymer carboxylates including aliphatic and aromatic types; and phytic acid. These may be complemented by borates, e.g., for pH-buffering purposes, or by sulfates, especially sodium sulfate and any other fillers or carriers which may be important to the engineering of stable surfactant and/or builder-containing detergent compositions.

Builder mixtures, sometimes termed "builder systems" can be used and typically comprise two or more conventional builders, optionally complemented by chelants, pH-buffers or fillers, though these latter materials are generally accounted for separately when describing quantities of materials herein. In terms of relative quantities of surfactant and builder in the present granular compositions, preferred builder systems are typically formulated at a weight

ratio of surfactant to builder of from about 60:1 to about 1:80. Certain preferred granular detergents have said ratio in the range 0.90:1.0 to 4.0:1.0, more preferably from 0.95:1.0 to 3.0:1.0.

P-containing detergent builders often preferred where permitted by legislation include, but are not limited to, the alkali metal, ammonium and alkanolammonium salts of polyphosphates exemplified by the tripolyphosphates, pyrophosphates, glassy polymeric meta-phosphates; and phosphonates. Where phosphorus-based builders can be used, the various alkali metal phosphates such as the well-known sodium tripolyphosphates, sodium pyrophosphate and sodium orthophosphate can be used. Phosphonate builders such as ethane-1-hydroxy-1,1-diphosphonate and other known phosphonates (see, for example, U.S. Patents 3,159,581; 3,213,030; 3,422,021; 3,400,148 and 3,422,137) can also be used though such materials are more commonly used in a low-level mode as chelants or stabilizers.

Phosphate detergent builders for use in granular compositions are well known. They include, but are not limited to, the alkali metal, ammonium and alkanolammonium salts of polyphosphates (exemplified by the tripolyphosphates, pyrophosphates, and glassy polymeric meta-phosphates). Phosphate builder sources are described in detail in Kirk Othmer, 3rd Edition, Vol. 17, pp. 426-472 and in "Advanced Inorganic Chemistry" by Cotton and Wilkinson, pp. 394-400 (John Wiley and Sons, Inc.; 1972).

Preferred levels of phosphate builders herein are from about 10% to about 75%, preferably from about 15% to about 50%, of phosphate builder.

Phosphate builders can optionally be included in the compositions herein to assist in controlling mineral hardness. Builders are typically used in automatic dishwashing to assist in the removal of particulate soils.

Suitable carbonate builders include alkaline earth and alkali metal carbonates as disclosed in German Patent Application No. 2,321,001 published on November 15, 1973, although sodium bicarbonate, sodium carbonate, sodium sesquicarbonate, and other carbonate minerals such as trona or any convenient multiple salts of sodium carbonate and calcium carbonate such as those having the composition  $2\text{Na}_2\text{CO}_3 \cdot \text{CaCO}_3$  when anhydrous, and even calcium carbonates including calcite, aragonite and vaterite, especially forms having high surface areas relative to compact calcite may be useful, for example as seeds. Various grades and types of sodium carbonate and sodium sesquicarbonate may be used, certain of which are particularly useful as carriers for other ingredients, especially deterative surfactants.

Suitable organic detergent builders include polycarboxylate compounds, including water-soluble nonsurfactant dicarboxylates and tricarboxylates. More typically builder polycarboxylates

have a plurality of carboxylate groups, preferably at least 3 carboxylates. Carboxylate builders can be formulated in acid, partially neutral, neutral or overbased form. When in salt form, alkali metals, such as sodium, potassium, and lithium, or alkanolammonium salts are preferred. Polycarboxylate builders include the ether polycarboxylates, such as oxydisuccinate, see Berg, 5 U.S. 3,128,287, April 7, 1964, and Lamberti et al, U.S. 3,635,830, January 18, 1972; "TMS/TDS" builders of U.S. 4,663,071, Bush et al, May 5, 1987; and other ether carboxylates including cyclic and alicyclic compounds, such as those described in U.S. Patents 3,923,679; 3,835,163; 4,158,635; 4,120,874 and 4,102,903.

Other suitable builders are the ether hydroxypolycarboxylates, copolymers of maleic 10 anhydride with ethylene or vinyl methyl ether; 1, 3, 5-trihydroxy benzene-2, 4, 6-trisulphonic acid; carboxymethyloxysuccinic acid; the various alkali metal, ammonium and substituted ammonium salts of polyacetic acids such as ethylenediamine tetraacetic acid and nitrilotriacetic acid; as well as mellitic acid, succinic acid, oxydisuccinic acid, polymaleic acid, benzene 1,3,5- 15 tricarboxylic acid, carboxymethyloxysuccinic acid, and soluble salts thereof.

Citrates, e.g., citric acid and soluble salts thereof are important carboxylate builders due to availability from renewable resources and biodegradability. Citrates can also be used in the present granular compositions, especially in combination with zeolite and/or layered silicates. Citrates can also be used in combination with zeolite, the hereafter mentioned BRITESIL types, and/or layered silicate builders. Oxydisuccinates are also useful in such compositions and 20 combinations. Oxydisuccinates are also especially useful in such compositions and combinations.

Where permitted alkali metal phosphates such as sodium tripolyphosphates, sodium pyrophosphate and sodium orthophosphate can be used. Phosphonate builders such as ethane-1- hydroxy-1,1-diphosphonate and other known phosphonates, e.g., those of U.S. 3,159,581; 25 3,213,030; 3,422,021; 3,400,148 and 3,422,137 can also be used and may have desirable antiscaling properties.

Certain deterative surfactants or their short-chain homologs also have a builder action. For unambiguous formula accounting purposes, when they have surfactant capability, these materials are summed up as deterative surfactants. Preferred types for builder functionality are 30 illustrated by: 3,3-dicarboxy-4-oxa-1,6-hexanedioates and the related compounds disclosed in U.S. 4,566,984, Bush, January 28, 1986. Succinic acid builders include the C<sub>5</sub>-C<sub>20</sub> alkyl and alkenyl succinic acids and salts thereof. Succinate builders also include: laurylsuccinate, myristylsuccinate, palmitylsuccinate, 2-dodecenylsuccinate (preferred), 2-pentadecenylsuccinate, and the like. Lauryl-succinates are described in European Patent Application

86200690.5/0,200,263, published November 5, 1986. Fatty acids, e.g., C<sub>12</sub>-C<sub>18</sub> monocarboxylic acids, can also be incorporated into the compositions as surfactant/builder materials alone or in combination with the aforementioned builders, especially citrate and/or the succinate builders, to provide additional builder activity but are generally not desired. Such use of fatty acids will generally result in a diminution of sudsing in laundry compositions, which may need to be taken into account by the formulator. Fatty acids or their salts are undesirable in Automatic Dishwashing (ADD) embodiments in situations wherein soap scums can form and be deposited on dishware. Other suitable polycarboxylates are disclosed in U.S. 4,144,226, Crutchfield et al, March 13, 1979 and in U.S. 3,308,067, Diehl, March 7, 1967. See also Diehl, U.S. 3,723,322.

Other types of inorganic builder materials which can be used have the formula  $(M_x)_i Ca_y (CO_3)_z$  wherein x and i are integers from 1 to 15, y is an integer from 1 to 10, z is an integer from 2 to 25, M<sub>i</sub> are cations, at least one of which is a water-soluble, and the equation  $\sum_i = 1-15(x_i \text{ multiplied by the valence of } M_i) + 2y = 2z$  is satisfied such that the formula has a neutral or "balanced" charge. These builders are referred to herein as "Mineral Builders". Waters of hydration or anions other than carbonate may be added provided that the overall charge is balanced or neutral. The charge or valence effects of such anions should be added to the right side of the above equation. Preferably, there is present a water-soluble cation selected from the group consisting of hydrogen, water-soluble metals, hydrogen, boron, ammonium, silicon, and mixtures thereof, more preferably, sodium, potassium, hydrogen, lithium, ammonium and mixtures thereof, sodium and potassium being highly preferred. Nonlimiting examples of noncarbonate anions include those selected from the group consisting of chloride, sulfate, fluoride, oxygen, hydroxide, silicon dioxide, chromate, nitrate, borate and mixtures thereof. Preferred builders of this type in their simplest forms are selected from the group consisting of Na<sub>2</sub>Ca(CO<sub>3</sub>)<sub>2</sub>, K<sub>2</sub>Ca(CO<sub>3</sub>)<sub>2</sub>, Na<sub>2</sub>Ca<sub>2</sub>(CO<sub>3</sub>)<sub>3</sub>, NaKCa(CO<sub>3</sub>)<sub>2</sub>, NaKCa<sub>2</sub>(CO<sub>3</sub>)<sub>3</sub>, K<sub>2</sub>Ca<sub>2</sub>(CO<sub>3</sub>)<sub>3</sub>, and combinations thereof. An especially preferred material for the builder described herein is Na<sub>2</sub>Ca(CO<sub>3</sub>)<sub>2</sub> in any of its crystalline modifications. Suitable builders of the above-defined type are further illustrated by, and include, the natural or synthetic forms of any one or combinations of the following minerals: Afghanite, Andersonite, AshcroftineY, Beyerite, Borcarite, Burbankite, Butschliite, Cancrinite, Carbocernaite, Carletonite, Davyne, DonnayiteY, Fairchildite, Ferrisurite, Franzinite, Gaudefroyite, Gaylussite, Girvasite, Gregoryite, Jouravskite, KamphaugiteY, Kettnerite, Khanneshite, LepersonniteGd, Liottite, MckelveyiteY, Microsommite, Mroseite, Natrofairchildite, Nyerereite, RemonditeCe, Sacrofanite, Schrockingerite, Shortite, Surite, Tunisite, Tuscanite, Tyrolite, Vishnevite, and Zemkorite. Preferred mineral forms include Nyerereite, Fairchildite and Shortite.

Detergent builders can also be selected from aluminosilicates and silicates, for example to assist in controlling mineral, especially Ca and/or Mg, hardness in wash water or to assist in the removal of particulate soils from surfaces.

Suitable silicate builders include water-soluble and hydrous solid types and including those having chain-, layer-, or three-dimensional- structure as well as amorphous-solid or non-structured-liquid types. Preferred are alkali metal silicates, particularly those liquids and solids having a  $\text{SiO}_2:\text{Na}_2\text{O}$  ratio in the range 1.6:1 to 3.2:1, including, particularly for automatic dishwashing purposes, solid hydrous 2-ratio silicates marketed by PQ Corp. under the tradename BRITESIL<sup>®</sup>, e.g., BRITESIL H<sub>2</sub>O; and layered silicates, e.g., those described in U.S. 4,664,839, May 12, 1987, H. P. Rieck. NaSKS-6, sometimes abbreviated "SKS-6", is a crystalline layered aluminium-free  $\delta\text{-Na}_2\text{SiO}_5$  morphology silicate marketed by Hoechst and is preferred especially in granular laundry compositions. See preparative methods in German DE-A-3,417,649 and DE-A-3,742,043. Other layered silicates, such as those having the general formula  $\text{NaMSi}_x\text{O}_{2x+1}\cdot y\text{H}_2\text{O}$  wherein M is sodium or hydrogen, x is a number from 1.9 to 4, preferably 2, and y is a number from 0 to 20, preferably 0, can also or alternately be used herein. Layered silicates from Hoechst also include NaSKS-5, NaSKS-7 and NaSKS-11, as the  $\alpha$ ,  $\beta$  and  $\gamma$  layer-silicate forms. Other silicates may also be useful, such as magnesium silicate, which can serve as a crispening agent in granules, as a stabilising agent for bleaches, and as a component of suds control systems.

Also suitable for use herein are synthesized crystalline ion exchange materials or hydrates thereof having chain structure and a composition represented by the following general formula in an anhydride form:  $x\text{M}_2\text{O}\cdot y\text{SiO}_2\cdot z\text{M}'\text{O}$  wherein M is Na and/or K, M' is Ca and/or Mg;  $y/x$  is 0.5 to 2.0 and  $z/x$  is 0.005 to 1.0 as taught in U.S. 5,427,711, Sakaguchi et al, June 27, 1995.

Aluminosilicate builders are especially useful in granular compositions, but can also be incorporated in liquids, pastes or gels. Suitable for the present purposes are those having empirical formula:  $[\text{M}_z(\text{AlO}_2)_z(\text{SiO}_2)_v]\cdot x\text{H}_2\text{O}$  wherein z and v are integers of at least 6, the molar ratio of z to v is in the range from 1.0 to 0.5, and x is an integer from 15 to 264. Aluminosilicates can be crystalline or amorphous, naturally-occurring or synthetically derived. An aluminosilicate production method is in U.S. 3,985,669, Krummel, et al, October 12, 1976. Preferred synthetic crystalline aluminosilicate ion exchange materials are available as Zeolite A, Zeolite P (B), Zeolite X and, to whatever extent this differs from Zeolite P, the so-called Zeolite MAP. Natural types, including clinoptilolite, may be used. Zeolite A has the formula:  $\text{Na}_{12}[(\text{AlO}_2)_{12}(\text{SiO}_2)_{12}]\cdot x\text{H}_2\text{O}$  wherein x is from 20 to 30, especially 27. Dehydrated zeolites

( $x = 0 - 10$ ) may also be used. Preferably, the aluminosilicate has a particle size of 0.1-10 microns in diameter.

Detergent builders other than silicates can be used in the compositions herein to assist in controlling mineral hardness. They can be used in conjunction with or instead of aluminosilicates and silicates. Inorganic as well as organic builders can be used. Builders are used in automatic dishwashing to assist in the removal of particulate soils.

Inorganic or non-phosphate-containing detergent builders include, but are not limited to, phosphonates, phytic acid, carbonates (including bicarbonates and sesquicarbonates), sulfates, citrate, zeolite, and aluminosilicates.

Aluminosilicate builders may be used in the present compositions though are not preferred for automatic dishwashing detergents. (See U.S. Pat. 4,605,509 for examples of preferred aluminosilicates.) Aluminosilicate builders are of great importance in most currently marketed heavy duty granular detergent compositions, and can also be a significant builder ingredient in liquid detergent formulations. Aluminosilicate builders include those having the empirical formula:  $\text{Na}_2\text{O} \cdot \text{Al}_2\text{O}_3 \cdot x\text{SiO}_2 \cdot y\text{H}_2\text{O}$  wherein  $z$  and  $y$  are integers of at least 6, the molar ratio of  $z$  to  $y$  is in the range from 1.0 to about 0.5, and  $x$  is an integer from about 15 to about 264.

Useful aluminosilicate ion exchange materials are commercially available. These aluminosilicates can be crystalline or amorphous in structure and can be naturally-occurring aluminosilicates or synthetically derived. A method for producing aluminosilicate ion exchange materials is disclosed in U.S. Patent 3,985,669, Krummel, et al, issued October 12, 1976. Preferred synthetic crystalline aluminosilicate ion exchange materials useful herein are available under the designations Zeolite A, Zeolite P (B), Zeolite MAP and Zeolite X. In another embodiment, the crystalline aluminosilicate ion exchange material has the formula:  $\text{Na}_{12}[(\text{AlO}_2)_{12}(\text{SiO}_2)_{12}] \cdot x\text{H}_2\text{O}$  wherein  $x$  is from about 20 to about 30, especially about 27. This material is known as Zeolite A. Dehydrated zeolites ( $x = 0 - 10$ ) may also be used herein. Preferably, the aluminosilicate has a particle size of about 0.1-10 microns in diameter. Individual particles can desirably be even smaller than 0.1 micron to further assist kinetics of exchange through maximization of surface area. High surface area also increases utility of aluminosilicates as adsorbents for surfactants, especially in granular compositions. Aggregates of aluminosilicate particles may be useful, a single aggregate having dimensions tailored to minimize segregation in granular compositions, while the aggregate particle remains dispersible to submicron individual particles during the wash. As with other builders such as carbonates, it may be desirable to use zeolites in any physical or morphological form adapted to promote surfactant carrier function, and appropriate particle sizes may be freely selected by the formulator.



Polymeric Soil Release Agent - The compositions according to the present invention may optionally comprise one or more soil release agents. Polymeric soil release agents are characterized by having both hydrophilic segments, to hydrophilize the surface of hydrophobic fibers, such as polyester and nylon, and hydrophobic segments, to deposit upon hydrophobic fibers and remain adhered thereto through completion of the laundry cycle and , thus, serve as an anchor for the hydrophilic segments. This can enable stains occurring subsequent to treatment with the soil release agent to be more easily cleaned in later washing procedures.

If utilized, soil release agents will generally comprise from about 0.01% to about 10% preferably from about 0.1% to about 5%, more preferably from about 0.2% to about 3% by weight, of the composition.

The following, all included herein by reference, describe soil release polymers suitable for us in the present invention. U.S. 5,691,298 Gosselink et al., issued November 25, 1997; U.S. 5,599,782 Pan et al., issued February 4, 1997; U.S. 5,415,807 Gosselink et al., issued May 16, 1995; U.S. 5,182,043 Morrall et al., issued January 26, 1993; U.S. 4,956,447 Gosselink et al., issued September 11, 1990; U.S. 4,976,879 Maldonado et al. issued December 11, 1990; U.S. 4,968,451 Scheibel et al., issued November 6, 1990; U.S. 4,925,577 Borchert, Sr. et al., issued May 15, 1990; U.S. 4,861,512 Gosselink, issued August 29, 1989; U.S. 4,877,896 Maldonado et al., issued October 31, 1989; U.S. 4,702,857 Gosselink et al., issued October 27, 1987; U.S. 4,711,730 Gosselink et al., issued December 8, 1987; U.S. 4,721,580 Gosselink issued January 26, 1988; U.S. 4,000,093 Nicol et al., issued December 28, 1976; U.S. 3,959,230 Hayes, issued May 25, 1976; U.S. 3,893,929 Basadur, issued July 8, 1975; and European Patent Application 0 219 048, published April 22, 1987 by Kud et al.

Further suitable soil release agents are described in U.S. 4,201,824 Voilland et al.; U.S. 4,240,918 Lagasse et al.; U.S. 4,525,524 Tung et al.; U.S. 4,579,681 Ruppert et al.; U.S. 4,220,918; U.S. 4,787,989; EP 279,134 A, 1988 to Rhone-Poulenc Chemie; EP 457,205 A to BASF (1991); and DE 2,335,044 to Unilever N.V., 1974; all incorporated herein by reference.

Clay Soil Removal/Anti-redeposition Agents - The compositions of the present invention can also optionally contain water-soluble ethoxylated amines having clay soil removal and antiredeposition properties. Granular compositions which contain these compounds typically contain from about 0.01% to about 10.0% by weight of the water-soluble ethoxylates amines; liquid detergent compositions typically contain about 0.01% to about 5%.

Polymeric Dispersing Agents - Polymeric dispersing agents can advantageously be utilized at levels from about 0.1% to about 7%, by weight, in the compositions herein, especially in the presence of zeolite and/or layered silicate builders. Suitable polymeric dispersing agents

include polymeric polycarboxylates and polyethylene glycols, although others known in the art can also be used. It is believed, though it is not intended to be limited by theory, that polymeric dispersing agents enhance overall detergent builder performance, when used in combination with other builders (including lower molecular weight polycarboxylates) by crystal growth inhibition, particulate soil release peptization, and anti-redeposition.

Polymeric polycarboxylate materials can be prepared by polymerizing or copolymerizing suitable unsaturated monomers, preferably in their acid form. Unsaturated monomeric acids that can be polymerized to form suitable polymeric polycarboxylates include acrylic acid, maleic acid (or maleic anhydride), fumaric acid, itaconic acid, aconitic acid, mesaconic acid, citraconic acid and methylenemalononic acid. The presence in the polymeric polycarboxylates herein or monomeric segments, containing no carboxylate radicals such as vinylmethyl ether, styrene, ethylene, etc. is suitable provided that such segments do not constitute more than about 40% by weight.

Particularly suitable polymeric polycarboxylates can be derived from acrylic acid. Such acrylic acid-based polymers which are useful herein are the water-soluble salts of polymerized acrylic acid. The average molecular weight of such polymers in the acid form preferably ranges from about 2,000 to 10,000, more preferably from about 4,000 to 7,000 and most preferably from about 4,000 to 5,000. Water-soluble salts of such acrylic acid polymers can include, for example, the alkali metal, ammonium and substituted ammonium salts. Soluble polymers of this type are known materials. Use of polyacrylates of this type in detergent compositions has been disclosed, for example, in Diehl, U.S. Patent 3,308,067, issued march 7, 1967.

Acrylic/maleic-based copolymers may also be used as a preferred component of the dispersing/anti-redeposition agent. Such materials include the water-soluble salts of copolymers of acrylic acid and maleic acid. The average molecular weight of such copolymers in the acid form preferably ranges from about 2,000 to 100,000, more preferably from about 5,000 to 75,000, most preferably from about 7,000 to 65,000. The ratio of acrylate to maleate segments in such copolymers will generally range from about 30:1 to about 1:1, more preferably from about 10:1 to 2:1. Water-soluble salts of such acrylic acid/maleic acid copolymers can include, for example, the alkali metal, ammonium and substituted ammonium salts. Soluble acrylate/maleate copolymers of this type are known materials which are described in European Patent Application No. 66915, published December 15, 1982, as well as in EP 193,360, published September 3, 1986, which also describes such polymers comprising hydroxypropylacrylate. Still other useful dispersing agents include the maleic/acrylic/vinyl alcohol terpolymers. Such materials are also

disclosed in EP 193,360, including, for example, the 45/45/10 terpolymer of acrylic/maleic/vinyl alcohol.

Another polymeric material which can be included is polyethylene glycol (PEG). PEG can exhibit dispersing agent performance as well as act as a clay soil removal-antiredeposition agent. Typical molecular weight ranges for these purposes range from about 500 to about 100,000, preferably from about 1,000 to about 50,000, more preferably from about 1,500 to about 10,000.

Polyaspartate and polyglutamate dispersing agents may also be used, especially in conjunction with zeolite builders. Dispersing agents such as polyaspartate preferably have a molecular weight (avg.) of about 10,000.

Brightener - Any optical brighteners or other brightening or whitening agents known in the art can be incorporated at levels typically from about 0.01% to about 1.2%, by weight, into the detergent compositions herein. Commercial optical brighteners which may be useful in the present invention can be classified into subgroups, which include, but are not necessarily limited to, derivatives of stilbene, pyrazoline, coumarin, carboxylic acid, methinecyanines, dibenzothiophene-5,5-dioxide, azoles, 5- and 6-membered-ring heterocycles, and other miscellaneous agents. Examples of such brighteners are disclosed in "The Production and Application of Fluorescent Brightening Agents", M. Zahradnik, Published by John Wiley & Sons, New York (1982).


Specific examples of optical brighteners which are useful in the present compositions are those identified in U.S. Patent 4,790,856, issued to Wixon on December 13, 1988. These brighteners include the PHORWHITE series of brighteners from Verona. Other brighteners disclosed in this reference include: Tinopal UNPA, Tinopal CBS and Tinopal 5BM; available from Ciba-Geigy; Artic White CC and Artic White CWD, the 2-(4-styryl-phenyl)-2H-naphtho[1,2-d]triazoles; 4,4'-bis-(1,2,3-triazol-2-yl)-stilbenes; 4,4'-bis(styryl)biphenyls; and the amino-coumarins. Specific examples of these brighteners include 4-methyl-7-diethyl- amino coumarin; 1,2-bis(benzimidazol-2-yl)ethylene; 1,3-diphenyl-pyrazolines; 2,5-bis(benzoxazol-2-yl)thiophene; 2-styryl-naphtho[1,2-d]oxazole; and 2-(stilben-4-yl)-2H-naphtho[1,2-d]triazole. See also U.S. Patent 3,646,015, issued February 29, 1972 to Hamilton.

Dye Transfer Inhibiting Agents - The compositions of the present invention may also include one or more materials effective for inhibiting the transfer of dyes from one fabric to another during the cleaning process. Generally, such dye transfer inhibiting agents include polyvinyl pyrrolidone polymers, polyamine N-oxide polymers, copolymers of N-vinylpyrrolidone and N-vinylimidazole, manganese phthalocyanine, peroxidases, and mixtures thereof. If used,

these agents typically comprise from about 0.01% to about 10% by weight of the composition, preferably from about 0.01% to about 5%, and more preferably from about 0.05% to about 2%.

More specifically, the polyamine N-oxide polymers preferred for use herein contain units having the following structural formula:  $R-A_x-P$ ; wherein P is a polymerizable unit to which an N-O group can be attached or the N-O group can form part of the polymerizable unit or the N-O group can be attached to both units; A is one of the following structures:  $-NC(O)-$ ,  $-C(O)O-$ ,  $-S-$ ,  $-O-$ ,  $-N=$ ; x is 0 or 1; and R is aliphatic, ethoxylated aliphatics, aromatics, heterocyclic or alicyclic groups or any combination thereof to which the nitrogen of the N-O group can be attached or the N-O group is part of these groups. Preferred polyamine N-oxides are those wherein R is a heterocyclic group such as pyridine, pyrrole, imidazole, pyrrolidine, piperidine and derivatives thereof.

The N-O group can be represented by the following general structures:

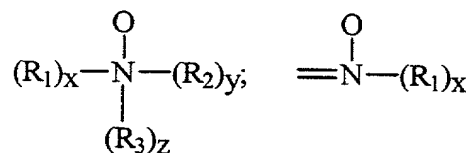

wherein  $R_1$ ,  $R_2$ ,  $R_3$  are aliphatic, aromatic, heterocyclic or alicyclic groups or combinations thereof; x, y and z are 0 or 1; and the nitrogen of the N-O group can be attached or form part of any of the aforementioned groups. The amine oxide unit of the polyamine N-oxides has a  $pK_a < 10$ , preferably  $pK_a < 7$ , more preferred  $pK_a < 6$ .

Any polymer backbone can be used as long as the amine oxide polymer formed is water-soluble and has dye transfer inhibiting properties. Examples of suitable polymeric backbones are polyvinyls, polyalkylenes, polyesters, polyethers, polyamide, polyimides, polyacrylates and mixtures thereof. These polymers include random or block copolymers where one monomer type is an amine N-oxide and the other monomer type is an N-oxide. The amine N-oxide polymers typically have a ratio of amine to the amine N-oxide of 10:1 to 1:1,000,000. However, the number of amine oxide groups present in the polyamine oxide polymer can be varied by appropriate copolymerization or by an appropriate degree of N-oxidation. The polyamine oxides can be obtained in almost any degree of polymerization. Typically, the average molecular weight is within the range of 500 to 1,000,000; more preferred 1,000 to 500,000; most preferred 5,000 to 100,000. This preferred class of materials can be referred to as "PVNO".


The most preferred polyamine N-oxide useful in the detergent compositions herein is poly(4-vinylpyridine-N-oxide) which has an average molecular weight of about 50,000 and an amine to amine N-oxide ratio of about 1:4.

Copolymers of N-vinylpyrrolidone and N-vinylimidazole polymers (referred to as a class as "PVPVI") are also preferred for use herein. Preferably the PVPVI has an average molecular weight range from 5,000 to 1,000,000, more preferably from 5,000 to 200,000, and most preferably from 10,000 to 20,000. (The average molecular weight range is determined by light scattering as described in Barth, et al., Chemical Analysis, Vol 113. "Modern Methods of Polymer Characterization", the disclosures of which are incorporated herein by reference.) The PVPVI copolymers typically have a molar ratio of N-vinylimidazole to N-vinylpyrrolidone from 1:1 to 0.2:1, more preferably from 0.8:1 to 0.3:1, most preferably from 0.6:1 to 0.4:1. These copolymers can be either linear or branched.

The present invention compositions also may employ a polyvinylpyrrolidone ("PVP") having an average molecular weight of from about 5,000 to about 400,000, preferably from about 5,000 to about 200,000, and more preferably from about 5,000 to about 50,000. PVP's are known to persons skilled in the detergent field; see, for example, EP-A-262,897 and EP-A-256,696, incorporated herein by reference. Compositions containing PVP can also contain polyethylene glycol ("PEG") having an average molecular weight from about 500 to about 100,000, preferably from about 1,000 to about 10,000. Preferably, the ratio of PEG to PVP on a ppm basis delivered in wash solutions is from about 2:1 to about 50:1, and more preferably from about 3:1 to about 10:1.

The compositions herein may also optionally contain from about 0.005% to 5% by weight of certain types of hydrophilic optical brighteners which also provide a dye transfer inhibition action. If used, the compositions herein will preferably comprise from about 0.01% to 1% by weight of such optical brighteners.

The hydrophilic optical brighteners useful in the present invention are those having the structural formula:

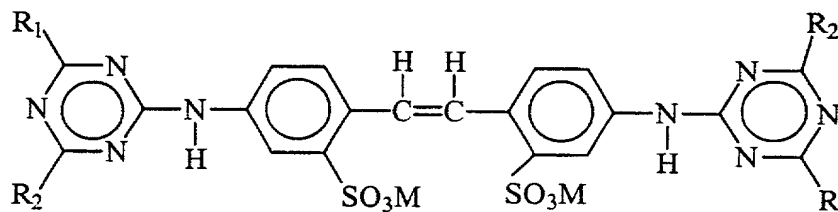

wherein  $R_1$  is selected from anilino, N-2-bis-hydroxyethyl and NH-2-hydroxyethyl;  $R_2$  is selected from N-2-bis-hydroxyethyl, N-2-hydroxyethyl-N-methylamino, morphilino, chloro and amino; and M is a salt-forming cation such as sodium or potassium.

When in the above formula,  $R_1$  is anilino,  $R_2$  is N-2-bis-hydroxyethyl and M is a cation such as sodium, the brightener is 4,4',-bis[(4-anilino-6-(N-2-bis-hydroxyethyl)-s-triazine-2-

yl)amino]-2,2'-stilbenedisulfonic acid and disodium salt. This particular brightener species is commercially marketed under the tradename Tinopal-UNPA-GX by Ciba-Geigy Corporation. Tinopal-UNPA-GX is the preferred hydrophilic optical brightener useful in the detergent compositions herein.

5        When in the above formula, R<sub>1</sub> is anilino, R<sub>2</sub> is N-2-hydroxyethyl-N-2-methylamino and M is a cation such as sodium, the brightener is 4,4'-bis[(4-anilino-6-(N-2-hydroxyethyl-N-methylamino)-s-triazine-2-yl)amino]2,2'-stilbenedisulfonic acid disodium salt. This particular brightener species is commercially marketed under the tradename Tinopal 5BM-GX by Ciba-Geigy Corporation.

10       When in the above formula, R<sub>1</sub> is anilino, R<sub>2</sub> is morphilino and M is a cation such as sodium, the brightener is 4,4'-bis[(4-anilino-6-morphilino-s-triazine-2-yl)amino]2,2'-stilbenedisulfonic acid, sodium salt. This particular brightener species is commercially marketed under the tradename Tinopal AMS-GX by Ciba Geigy Corporation.

15       The specific optical brightener species selected for use in the present invention provide especially effective dye transfer inhibition performance benefits when used in combination with the selected polymeric dye transfer inhibiting agents hereinbefore described. The combination of such selected polymeric materials (e.g., PVNO and/or PVPVI) with such selected optical brighteners (e.g., Tinopal UNPA-GX, Tinopal 5BM-GX and/or Tinopal AMS-GX) provides significantly better dye transfer inhibition in aqueous wash solutions than does either of these two  
20       granular composition components when used alone. Without being bound by theory, it is believed that such brighteners work this way because they have high affinity for fabrics in the wash solution and therefore deposit relatively quick on these fabrics. The extent to which brighteners deposit on fabrics in the wash solution can be defined by a parameter called the "exhaustion coefficient". The exhaustion coefficient is in general as the ratio of a) the brightener  
25       material deposited on fabric to b) the initial brightener concentration in the wash liquor. Brighteners with relatively high exhaustion coefficients are the most suitable for inhibiting dye transfer in the context of the present invention.

Of course, it will be appreciated that other, conventional optical brightener types of compounds can optionally be used in the present compositions to provide conventional fabric  
30       "brightness" benefits, rather than a true dye transfer inhibiting effect. Such usage is conventional and well-known to detergent formulations.

Suds Suppressors - Compounds for reducing or suppressing the formation of suds can be incorporated into the compositions of the present invention. Suds suppression can be of

particular importance in the so-called "high concentration cleaning process" as described in U.S. 4,489,455 and 4,489,574 and in front-loading European-style washing machines.

A wide variety of materials may be used as suds suppressors, and suds suppressors are well known to those skilled in the art. See, for example, Kirk Othmer Encyclopedia of Chemical Technology, Third Edition, Volume 7, pages 430-447 (John Wiley & Sons, Inc., 1979). One category of suds suppressor of particular interest encompasses monocarboxylic fatty acid and soluble salts therein. See U.S. Patent 2,954,347, issued September 27, 1960 to Wayne St. John. The monocarboxylic fatty acids and salts thereof used as suds suppressor typically have hydrocarbyl chains of 10 to about 24 carbon atoms, preferably 12 to 18 carbon atoms. Suitable salts include the alkali metal salts such as sodium, potassium, and lithium salts, and ammonium and alkanolammonium salts.

The compositions herein may also contain non-surfactant suds suppressors. These include, for example: high molecular weight hydrocarbons such as paraffin, fatty acid esters (e.g., fatty acid triglycerides), fatty acid esters of monovalent alcohols, aliphatic C<sub>18</sub>-C<sub>40</sub> ketones (e.g., stearone), etc. Other suds inhibitors include N-alkylated amino triazines such as tri- to hexa-alkylmelamines or di- to tetra-alkyldiamine chlortriazines formed as products of cyanuric chloride with two or three moles of a primary or secondary amine containing 1 to 24 carbon atoms, propylene oxide, and monostearyl phosphates such as monostearyl alcohol phosphate ester and monostearyl di-alkali metal (e.g., K, Na, and Li) phosphates and phosphate esters. The hydrocarbons such as paraffin and haloparaffin can be utilized in liquid form. The liquid hydrocarbons will be liquid at room temperature and atmospheric pressure, and will have a pour point in the range of about -40°C and about 50°C, and a minimum boiling point not less than about 110°C (atmospheric pressure). It is also known to utilize waxy hydrocarbons, preferably having a melting point below about 100°C. The hydrocarbons constitute a preferred category of suds suppressor for detergent compositions. Hydrocarbon suds suppressors are described, for example, in U.S. Patent 4,265,779, issued May 5, 1981 to Gandolfo et al. The hydrocarbons, thus, include aliphatic, alicyclic, aromatic, and heterocyclic saturated or unsaturated hydrocarbons having from about 12 to about 70 carbon atoms. The term "paraffin," as used in this suds suppressor discussion, is intended to include mixtures of true paraffins and cyclic hydrocarbons.

Another preferred category of non-surfactant suds suppressors comprises silicone suds suppressors. This category includes the use of polyorganosiloxane oils, such as polydimethylsiloxane, dispersions or emulsions of polyorganosiloxane oils or resins, and combinations of polyorganosiloxane with silica particles wherein the polyorganosiloxane is chemisorbed or fused

onto the silica. Silicone suds suppressors are well known in the art and are, for example, disclosed in U.S. Patent 4,265,779, issued May 5, 1981 to Gandolfo et al and European Patent Application No. 89307851.9, published February 7, 1990, by Starch, M. S.

Other silicone suds suppressors are disclosed in U.S. Patent 3,455,839 which relates to  
5 compositions and processes for defoaming aqueous solutions by incorporating therein small amounts of polydimethylsiloxane fluids.

Mixtures of silicone and silanated silica are described, for instance, in German Patent Application DOS 2,124,526. Silicone defoamers and suds controlling agents in granular detergent compositions are disclosed in U.S. Patent 3,933,672, Bartolotta et al, and in U.S. Patent  
10 4,652,392, Baginski et al, issued March 24, 1987.

An exemplary silicone based suds suppressor for use herein is a suds suppressing amount of a suds controlling agent consisting essentially of:

- (i) polydimethylsiloxane fluid having a viscosity of from about 20 cs. to about 1,500 cs. at 25°C;
- 15 (ii) from about 5 to about 50 parts per 100 parts by weight of (i) of siloxane resin composed of  $(\text{CH}_3)_3\text{SiO}_{1/2}$  units of  $\text{SiO}_2$  units in a ratio of from  $(\text{CH}_3)_3\text{SiO}_{1/2}$  units and to  $\text{SiO}_2$  units of from about 0.6:1 to about 1.2:1; and
- (iii) from about 1 to about 20 parts per 100 parts by weight of (i) of a solid silica gel.

In the preferred silicone suds suppressor used herein, the solvent for a continuous phase  
20 is made up of certain polyethylene glycols or polyethylene-polypropylene glycol copolymers or mixtures thereof (preferred), or polypropylene glycol. The primary silicone suds suppressor is branched/crosslinked and preferably not linear.

To illustrate this point further, typical liquid laundry detergent compositions with controlled suds will optionally comprise from about 0.001 to about 1, preferably from about 0.01  
25 to about 0.7, most preferably from about 0.05 to about 0.5, weight % of said silicone suds suppressor, which comprises (1) a nonaqueous emulsion of a primary antifoam agent which is a mixture of (a) a polyorganosiloxane, (b) a resinous siloxane or a silicone resin-producing silicone compound, (c) a finely divided filler material, and (d) a catalyst to promote the reaction of mixture components (a), (b) and (c), to form silanates; (2) at least one nonionic silicone  
30 surfactant; and (3) polyethylene glycol or a copolymer of polyethylene-polypropylene glycol having a solubility in water at room temperature of more than about 2 weight %; and without polypropylene glycol. Similar amounts can be used in granular compositions, gels, etc. See also U.S. Patents 4,978,471, Starch, issued December 18, 1990, and 4,983,316, Starch, issued January



8, 1991, 5,288,431, Huber et al., issued February 22, 1994, and U.S. Patents 4,639,489 and 4,749,740, Aizawa et al at column 1, line 46 through column 4, line 35.

The silicone suds suppressor herein preferably comprises polyethylene glycol and a copolymer of polyethylene glycol/polypropylene glycol, all having an average molecular weight of less than about 1,000, preferably between about 100 and 800. The polyethylene glycol and polyethylene/polypropylene copolymers herein have a solubility in water at room temperature of more than about 2 weight %, preferably more than about 5 weight %.

The preferred solvent herein is polyethylene glycol having an average molecular weight of less than about 1,000, more preferably between about 100 and 800, most preferably between 200 and 400, and a copolymer of polyethylene glycol/polypropylene glycol, preferably PPG 200/PEG 300. Preferred is a weight ratio of between about 1:1 and 1:10, most preferably between 1:3 and 1:6, of polyethylene glycol:copolymer of polyethylene-polypropylene glycol.

The preferred silicone suds suppressors used herein do not contain polypropylene glycol, particularly of 4,000 molecular weight. They also preferably do not contain block copolymers of ethylene oxide and propylene oxide, like PLURONIC L101.

Other suds suppressors useful herein comprise the secondary alcohols (e.g., 2-alkyl alkanols) and mixtures of such alcohols with silicone oils, such as the silicones disclosed in U.S. 4,798,679, 4,075,118 and EP 150,872. The secondary alcohols include the C<sub>6</sub>-C<sub>16</sub> alkyl alcohols having a C<sub>1</sub>-C<sub>16</sub> chain. A preferred alcohol is 2-butyl octanol, which is available from Condea under the trademark ISOFOL 12. Mixtures of secondary alcohols are available under the trademark ISALCHEM 123 from Enichem. Mixed suds suppressors typically comprise mixtures of alcohol + silicone at a weight ratio of 1:5 to 5:1.

For any granular compositions to be used in automatic laundry washing machines, suds should not form to the extent that they overflow the washing machine. Suds suppressors, when utilized, are preferably present in a "suds suppressing amount. By "suds suppressing amount" is meant that the formulator of the composition can select an amount of this suds controlling agent that will sufficiently control the suds to result in a low-sudsing granular detergent for use in automatic laundry washing machines.

The compositions herein may comprise from 0% to about 10% of suds suppressor. When utilized as suds suppressors, monocarboxylic fatty acids, and salts therein, will be present typically in amounts up to about 5%, by weight, of the detergent composition. Preferably, from about 0.5% to about 3% of fatty monocarboxylate suds suppressor is utilized. Silicone suds suppressors are typically utilized in amounts up to about 2.0%, by weight, of the detergent composition, although higher amounts may be used. This upper limit is practical in nature, due

primarily to concern with keeping costs minimized and effectiveness of lower amounts for effectively controlling sudsing. Preferably from about 0.01% to about 1% of silicone suds suppressor is used, more preferably from about 0.25% to about 0.5%. As used herein, these weight percentage values include any silica that may be utilized in combination with polyorganosiloxane, as well as any adjunct materials that may be utilized. Monostearyl phosphate suds suppressors are generally utilized in amounts ranging from about 0.1% to about 2%, by weight, of the composition. Hydrocarbon suds suppressors are typically utilized in amounts ranging from about 0.01% to about 5.0%, although higher levels can be used. The alcohol suds suppressors are typically used at 0.2%-3% by weight of the finished compositions.

Alkoxylated Polycarboxylates - Alkoxylated polycarboxylates such as those prepared from polyacrylates are useful herein to provide additional grease removal performance. Such materials are described in WO 91/08281 and PCT 90/01815 at p. 4 et seq., incorporated herein by reference. Chemically, these materials comprise polyacrylates having one ethoxy side-chain per every 7-8 acrylate units. The side-chains are of the formula  $-(CH_2CH_2O)_m(CH_2)_nCH_3$  wherein m is 2-3 and n is 6-12. The side-chains are ester-linked to the polyacrylate "backbone" to provide a "comb" polymer type structure. The molecular weight can vary, but is typically in the range of about 2000 to about 50,000. Such alkoxylated polycarboxylates can comprise from about 0.05% to about 10%, by weight, of the compositions herein.

Fabric Softeners - Various through-the-wash fabric softeners, especially the impalpable smectite clays of U.S. Patent 4,062,647, Storm and Nirschl, issued December 13, 1977, as well as other softener clays known in the art, can optionally be used typically at levels of from about 0.5% to about 10% by weight in the present compositions to provide fabric softener benefits concurrently with fabric cleaning. Clay softeners can be used in combination with amine and cationic softeners as disclosed, for example, in U.S. Patent 4,375,416, Crisp et al, March 1, 1983 and U.S. Patent 4,291,071, Harris et al, issued September 22, 1981.

#### NON-AQUEOUS BASED HEAVY DUTY LIQUID DETERGENTS

##### SURFACTANT-CONTAINING LIQUID PHASE

The present invention comprises non-aqueous, liquid, heavy-duty detergent compositions in the form of a stable suspension of solid, substantially insoluble particulate material dispersed throughout a structured, surfactant-containing liquid phase. The detergent composition comprises from about 49% to 99.95% by weight of the composition of a structured, surfactant-containing liquid phase formed by combining:

- i) from about 1% to 80% by weight of said liquid phase of one or more nonaqueous organic diluents; and

ii) from about 20% to 99% by weight of said liquid phase of a surfactant system comprising surfactants selected from the group consisting of anionic, nonionic, cationic surfactants and combinations thereof.

The surfactant-containing, non-aqueous liquid phase of the present invention will generally comprise from about 52% to about 98.9% by weight of the detergent compositions herein. More preferably, this liquid phase is surfactant-structured and will comprise from about 55% to 98% by weight of the compositions. Most preferably, this non-aqueous liquid phase will comprise from about 55% to 70% by weight of the compositions herein. Such a surfactant-containing liquid phase will frequently have a density of from about 0.6 to 1.4 g/cc, more preferably from about 0.9 to 1.3 g/cc. The liquid phase of the detergent compositions herein is preferably formed from one or more non-aqueous organic diluents into which is mixed a surfactant structuring agent which is preferably a specific type of anionic surfactant-containing powder.


#### Non-aqueous Organic Diluents

The major component of the liquid phase of the HDL compositions herein comprises one or more non-aqueous organic diluents. The non-aqueous organic diluents used in this invention may be either surface active, i.e., surfactant, liquids or non-aqueous, non-surfactant liquids referred to herein as non-aqueous solvents. The term "solvent" is used herein to connote the non-surfactant, non-aqueous liquid portion of the compositions herein. While some of the essential and/or optional components of the compositions herein may actually dissolve in the "solvent"-containing liquid phase, other components will be present as particulate material dispersed within the "solvent"-containing liquid phase. Thus the term "solvent" is not meant to require that the solvent material be capable of actually dissolving all of the detergent composition components added thereto.

The non-aqueous liquid diluent component will generally comprise from about 50% to 100%, more preferably from about 50% to 80%, most preferably from about 55% to 75%, of a structured, surfactant-containing liquid phase. Preferably the liquid phase of the compositions herein, i.e., the non-aqueous liquid diluent component, will comprise both non-aqueous liquid surfactants and non-surfactant non-aqueous solvents.

i) Non-aqueous Surfactant Liquids - Suitable types of non-aqueous surfactant liquids which can be used to form the liquid phase of the compositions herein include the alkoxylated alcohols, ethylene oxide (EO)-propylene oxide (PO) block polymers, polyhydroxy fatty acid amides, alkylpolysaccharides, and the like. Such normally liquid surfactants are those having an HLB ranging from 10 to 16. Most preferred of the surfactant liquids are the alcohol alkoxylate nonionic surfactants.

Alcohol alkoxyates are materials which correspond to the general formula:



wherein  $R^1$  is a  $C_8 - C_{16}$  alkyl group,  $m$  is from 2 to 4, and  $n$  ranges from about 2 to 12. Preferably  $R^1$  is an alkyl group, which may be primary or secondary, that contains from about 9 to 15 carbon atoms, more preferably from about 10 to 14 carbon atoms. Preferably also the alkoxyated fatty alcohols will be ethoxylated materials that contain from about 2 to 12 ethylene oxide moieties per molecule, more preferably from about 3 to 10 ethylene oxide moieties per molecule.

The alkoxyated fatty alcohol materials useful in the liquid phase will frequently have a hydrophilic-lipophilic balance (HLB) which ranges from about 3 to 17. More preferably, the HLB of this material will range from about 6 to 15, most preferably from about 8 to 15.

Examples of fatty alcohol alkoxyates useful in or as the non-aqueous liquid phase of the compositions herein will include those which are made from alcohols of 12 to 15 carbon atoms and which contain about 7 moles of ethylene oxide. Such materials have been commercially marketed under the trade names Neodol 25-7 and Neodol 23-6.5 by Shell Chemical Company. Other useful Neodols include Neodol 1-5, an ethoxylated fatty alcohol averaging 11 carbon atoms in its alkyl chain with about 5 moles of ethylene oxide; Neodol 23-9, an ethoxylated primary  $C_{12} - C_{13}$  alcohol having about 9 moles of ethylene oxide and Neodol 91-10, an ethoxylated  $C_9 - C_{11}$  primary alcohol having about 10 moles of ethylene oxide. Alcohol ethoxylates of this type have also been marketed by Shell Chemical Company under the Dobanol tradename. Dobanol 91-5 is an ethoxylated  $C_9 - C_{11}$  fatty alcohol with an average of 5 moles ethylene oxide and Dobanol 25-7 is an ethoxylated  $C_{12} - C_{15}$  fatty alcohol with an average of 7 moles of ethylene oxide per mole of fatty alcohol.

Other examples of suitable ethoxylated alcohols include Tergitol 15-S-7 and Tergitol 15-S-9 both of which are linear secondary alcohol ethoxylates that have been commercially marketed by Union Carbide Corporation. The former is a mixed ethoxylation product of  $C_{11}$  to  $C_{15}$  linear secondary alkanol with 7 moles of ethylene oxide and the latter is a similar product but with 9 moles of ethylene oxide being reacted.

Other types of alcohol ethoxylates useful in the present compositions are higher molecular weight nonionics, such as Neodol 45-11, which are similar ethylene oxide condensation products of higher fatty alcohols, with the higher fatty alcohol being of 14-15 carbon atoms and the number of ethylene oxide groups per mole being about 11. Such products have also been commercially marketed by Shell Chemical Company.

If alcohol alkoxylate nonionic surfactant is utilized as part of the non-aqueous liquid phase in the detergent compositions herein, it will preferably be present to the extent of from about 1% to 60% of the composition structured liquid phase. More preferably, the alcohol alkoxylate component will comprise about 5% to 40% of the structured liquid phase. Most preferably, an alcohol alkoxylate component will comprise from about 5% to 35% of the detergent composition structured liquid phase. Utilization of alcohol alkoxylate in these concentrations in the liquid phase corresponds to an alcohol alkoxylate concentration in the total composition of from about 1% to 60% by weight, more preferably from about 2% to 40% by weight, and most preferably from about 5% to 25% by weight, of the composition.

Another type of non-aqueous surfactant liquid which may be utilized in this invention are the ethylene oxide (EO) - propylene oxide (PO) block polymers. Materials of this type are well known nonionic surfactants which have been marketed under the tradename Pluronic. These materials are formed by adding blocks of ethylene oxide moieties to the ends of polypropylene glycol chains to adjust the surface active properties of the resulting block polymers. EO-PO block polymer nonionics of this type are described in greater detail in Davidsohn and Milwidsky; Synthetic Detergents, 7th Ed.; Longman Scientific and Technical (1987) at pp. 34-36 and pp. 189-191 and in U.S. Patents 2,674,619 and 2,677,700. All of these publications are incorporated herein by reference. These Pluronic type nonionic surfactants are also believed to function as effective suspending agents for the particulate material which is dispersed in the liquid phase of the detergent compositions herein.

Another possible type of non-aqueous surfactant liquid useful in the compositions herein comprises polyhydroxy fatty acid amide surfactants, which have been defined herein before. If present, the polyhydroxy fatty acid amide surfactants are preferably present in a concentration of from about 0.1 to about 8%.

The amount of total liquid surfactant in the preferred surfactant-structured, non-aqueous liquid phase herein will be determined by the type and amounts of other composition components and by the desired composition properties. Generally, the liquid surfactant can comprise from about 35% to 70% of the non-aqueous liquid phase of the compositions herein. More preferably, the liquid surfactant will comprise from about 50% to 65% of a non-aqueous structured liquid phase. This corresponds to a non-aqueous liquid surfactant concentration in the total composition of from about 15% to 70% by weight, more preferably from about 20% to 50% by weight, of the composition.

ii) Non-surfactant Non-aqueous Organic Solvents - The liquid phase of the HDL compositions herein may also comprise one or more non-surfactant, non-aqueous organic solvents. Such non-

surfactant non-aqueous liquids are preferably those of low polarity. For purposes of this invention, "low-polarity" liquids are those which have little, if any, tendency to dissolve one of the preferred types of particulate material used in the compositions herein, i.e., the peroxygen bleaching agents, sodium perborate or sodium percarbonate. Thus relatively polar solvents such as ethanol are preferably not utilized. Suitable types of low-polarity solvents useful in the non-aqueous liquid detergent compositions herein do include non-vicinal C<sub>4</sub>-C<sub>8</sub> alkylene glycols, alkylene glycol mono lower alkyl ethers, lower molecular weight polyethylene glycols, lower molecular weight methyl esters and amides, and the like.

A preferred type of non-aqueous, low-polarity solvent for use in the compositions herein comprises the non-vicinal C<sub>4</sub>-C<sub>8</sub> branched or straight chain alkylene glycols. Materials of this type include hexylene glycol (4-methyl-2,4-pentanediol), 1,6-hexanediol, 1,3-butylene glycol and 1,4-butylene glycol. Hexylene glycol is the most preferred.

Another preferred type of non-aqueous, low-polarity solvent for use herein comprises the mono-, di-, tri-, or tetra- C<sub>2</sub>-C<sub>3</sub> alkylene glycol mono C<sub>2</sub>-C<sub>6</sub> alkyl ethers. The specific examples of such compounds include diethylene glycol monobutyl ether, tetraethylene glycol monobutyl ether, dipropylene glycol monoethyl ether, and dipropylene glycol monobutyl ether. Diethylene glycol monobutyl ether, dipropylene glycol monobutyl ether and butoxy-propoxy-propanol (BPP) are especially preferred. Compounds of the type have been commercially marketed under the tradenames Dowanol, Carbitol, and Cellosolve.

Another preferred type of non-aqueous, low-polarity organic solvent useful herein comprises the lower molecular weight polyethylene glycols (PEGs). Such materials are those having molecular weights of at least about 150. PEGs of molecular weight ranging from about 200 to 600 are most preferred.

Yet another preferred type of non-polar, non-aqueous solvent comprises lower molecular weight methyl esters. Such materials are those of the general formula: R<sup>1</sup>-C(O)-OCH<sub>3</sub> wherein R<sup>1</sup> ranges from 1 to about 18. Examples of suitable lower molecular weight methyl esters include methyl acetate, methyl propionate, methyl octanoate, and methyl dodecanoate.

The non-aqueous, generally low-polarity, non-surfactant organic solvent(s) employed should, of course, be compatible and non-reactive with other composition components, e.g., bleach and/or activators, used in the liquid detergent compositions herein. Such a solvent component is preferably utilized in an amount of from about 1% to 70% by weight of the liquid phase. More preferably, a non-aqueous, low-polarity, non-surfactant solvent will comprise from about 10% to 60% by weight of a structured liquid phase, most preferably from about 20% to 50% by weight, of a structured liquid phase of the composition. Utilization of non-surfactant

solvent in these concentrations in the liquid phase corresponds to a non-surfactant solvent concentration in the total composition of from about 1% to 50% by weight, more preferably from about 5% to 40% by weight, and most preferably from about 10% to 30% by weight, of the composition.

- 5    iii) Blends of Surfactant and Non-surfactant Solvents - In systems which employ both non-aqueous surfactant liquids and non-aqueous non-surfactant solvents, the ratio of surfactant to non-surfactant liquids, e.g., the ratio of alcohol alkoxylate to low polarity solvent, within a structured, surfactant-containing liquid phase can be used to vary the rheological properties of the detergent compositions eventually formed. Generally, the weight ratio of surfactant liquid to  
10    non-surfactant organic solvent will range about 50:1 to 1:50. More preferably, this ratio will range from about 3:1 to 1:3, most preferably from about 2:1 to 1:2.

#### Surfactant Structurant

- The non-aqueous liquid phase of the HDL compositions of this invention is prepared by combining with the non-aqueous organic liquid diluents hereinbefore described a surfactant  
15    which is generally, but not necessarily, selected to add structure to the non-aqueous liquid phase of the detergent compositions herein. Structuring surfactants can be of the anionic, nonionic, cationic, and/or amphoteric types.

- Preferred structuring surfactants are the anionic surfactants such as the alkyl sulfates, linear alkyl benzene sulfonate (LAS), the alkyl polyalkxylate sulfates and the linear alkyl benzene sulfonates. Another common type of anionic surfactant material which may be optionally added  
20    to the detergent compositions herein as structurant comprises carboxylate-type anionics. Carboxylate-type anionics include the C<sub>10</sub>-C<sub>18</sub> alkyl alkoxy carboxylates (especially the EO 1 to 5 ethoxycarboxylates) and the C<sub>10</sub>-C<sub>18</sub> sarcosinates, especially oleoyl sarcosinate. Yet another common type of anionic surfactant material which may be employed as a structurant comprises  
25    other sulfonated anionic surfactants such as the C<sub>8</sub>-C<sub>18</sub> paraffin sulfonates and the C<sub>8</sub>-C<sub>18</sub> olefin sulfonates. Structuring anionic surfactants will generally comprise from about 1% to 30% by weight of the compositions herein.

- As indicated, one preferred type of structuring anionic surfactant comprises primary or secondary alkyl sulfate anionic surfactants. Such surfactants are those produced by the sulfation  
30    of higher C<sub>8</sub>-C<sub>20</sub> fatty alcohols.

The most preferred type of anionic surfactant for use as a structurant in the HDL compositions herein comprises the linear alkyl benzene sulfonate (LAS) surfactants.

#### SOLID PARTICULATE MATERIALS

The non-aqueous HDL compositions herein preferably comprise from about 0.01% to 50% by weight, more preferably from about 0.2% to 30% by weight, of solid phase particulate material which is dispersed and suspended within the liquid phase. Generally such particulate material will range in size from about 0.1 to 1500 microns, more preferably from about 0.1 to 900 microns. Most preferably, such material will range in size from about 5 to 200 microns.

The particulate material utilized herein can comprise one or more types of detergent composition components which in particulate form are substantially insoluble in the non-aqueous liquid phase of the composition. The types of particulate materials which can be utilized are described are peroxygen bleaching agent, organic builder, inorganic alkalinity source (preferably include water-soluble alkali metal carbonates, bicarbonates, borates, pyrophosphates, orthophosphates, polyphosphates phosphonates, silicates and metasilicates), colored speckles and mixtures thereof.

#### AQUEOUS BASED HEAVY DUTY LIQUID DETERGENTS

The present invention also comprises aqueous based liquid detergent compositions. The aqueous liquid detergent compositions preferably comprise from about 10% to about 98%, preferably from about 30% to about 95%, by weight of an aqueous liquid carrier which is preferably water. Additionally, the aqueous liquid detergent compositions of the present invention comprise a surfactant system which preferably contains one or more deterative co-surfactants in addition to the branched surfactants disclosed above. The additional co-surfactants can be selected from nonionic deterative surfactant, anionic deterative surfactant, zwitterionic deterative surfactant, amine oxide deterative surfactant, and mixtures thereof. The surfactant system typically comprises from about 5% to about 70%, preferably from about 15% to about 30%, by weight of the detergent composition. These surfactants are hereinbefore described.

#### OTHER OPTIONAL HDL COMPOSITION COMPONENTS

In addition to the liquid and solid phase components as hereinbefore described, the aqueous and non-aqueous based detergent compositions can, and preferably will, contain various other optional components. Such optional components may be in either liquid or solid form. The optional components may either dissolve in the liquid phase or may be dispersed within the liquid phase in the form of fine particles or droplets. Suitable optional material includes for example chelating agents, enzymes, builders, bleach catalysts, bleach activators, thickeners, viscosity control agents and/or dispersing agents suds boosters, liquid bleach activator, dye transfer inhibitors, solvents, suds suppressors, structure elasticizing agent, anti redeposition agents, to exemplify but a few possible optional ingredients. Some of the materials which may optionally be utilized in the compositions herein are described in greater detail. Further details on suitable



adjunct ingredients to HDL compositions, methods of preparing same and use in the compositions can be found in U.S. Patent applications Serial Nos. 60/062,087 (Docket No. 6876P), and 60/061,924 (Docket No. 6877P),

Other Ingredients - The detergent compositions will further preferably comprise one or more deterative adjuncts selected from the following: electrolytes (such as sodium chloride), polysaccharides, abrasives, bactericides, tarnish inhibitors, dyes, antifungal or mildew control agents, insect repellents, perfumes, hydrotropes, thickeners, processing aids, suds boosters, anti-corrosive aids, stabilizers and antioxidants. A wide variety of other ingredients useful in detergent compositions can be included in the compositions herein, including other active ingredients, carriers, hydrotropes, antioxidants, processing aids, dyes or pigments, solvents for liquid formulations, etc. If high sudsing is desired, suds boosters such as the C<sub>10</sub>-C<sub>16</sub> alkanolamides can be incorporated into the compositions, typically at 1%-10% levels. The C<sub>10</sub>-C<sub>14</sub> monoethanol and diethanol amides illustrate a typical class of such suds boosters. Use of such suds boosters with high sudsing adjunct surfactants such as the amine oxides, betaines and sultaines noted above is also advantageous.

An antioxidant can be optionally added to the detergent compositions of the present invention. They can be any conventional antioxidant used in detergent compositions, such as 2,6-di-tert-butyl-4-methylphenol (BHT), carbamate, ascorbate, thiosulfate, monoethanolamine(MEA), diethanolamine, triethanolamine, etc. It is preferred that the antioxidant, when present, be present in the composition from about 0.001% to about 5% by weight.

Various deterative ingredients employed in the present compositions optionally can be further stabilized by absorbing said ingredients onto a porous hydrophobic substrate, then coating said substrate with a hydrophobic coating. Preferably, the deterative ingredient is admixed with a surfactant before being absorbed into the porous substrate. In use, the deterative ingredient is released from the substrate into the aqueous washing liquor, where it performs its intended deterative function.

To illustrate this technique in more detail, a porous hydrophobic silica (trademark SIPERNAT D10, DeGussa) is admixed with a proteolytic enzyme solution containing 3%-5% of C<sub>13-15</sub> ethoxylated alcohol (EO 7) nonionic surfactant. Typically, the enzyme/surfactant solution is 2.5 X the weight of silica. The resulting powder is dispersed with stirring in silicone oil (various silicone oil viscosities in the range of 500-12,500 can be used). The resulting silicone oil dispersion is emulsified or otherwise added to the final detergent matrix. By this means, ingredients such as the aforementioned enzymes, bleaches, bleach activators, bleach

catalysts, photoactivators, dyes, fluorescers, fabric conditioners and hydrolyzable surfactants can be "protected" for use in detergents, including liquid laundry detergent compositions.

Further, the compositions may optionally comprises a hydrotrope. Suitable hydrotropes include sodium, potassium, ammonium or water-soluble substituted ammonium salts of toluene sulfonic acid, naphthalene sulfonic acid, cumene sulfonic acid, xylene sulfonic acid.

The manufacture of LDL compositions which comprise a non-aqueous carrier medium can be prepared according to the disclosures of U.S. Patents 4,753,570; 4,767,558; 4,772,413; 4,889,652; 4,892,673; GB-A-2,158,838; GB-A-2,195,125; GB-A-2,195,649; U.S. 4,988,462; U.S. 5,266,233; EP-A-225,654 (6/16/87); EP-A-510,762 (10/28/92); EP-A-540,089 (5/5/93); EP-A-540,090 (5/5/93); U.S. 4,615,820; EP-A-565,017 (10/13/93); EP-A-030,096 (6/10/81), incorporated herein by reference. Such compositions can contain various particulate deterative ingredients stably suspended therein. Such non-aqueous compositions thus comprise a LIQUID PHASE and, optionally but preferably, a SOLID PHASE, all as described in more detail hereinafter and in the cited references.

The LDL compositions of this invention can be used to form aqueous washing solutions for use hand dishwashing. Generally, an effective amount of such LDL compositions is added to water to form such aqueous cleaning or soaking solutions. The aqueous solution so formed is then contacted with the dishware, tableware, and cooking utensils.

An effective amount of the LDL compositions herein added to water to form aqueous cleaning solutions can comprise amounts sufficient to form from about 500 to 20,000 ppm of composition in aqueous solution. More preferably, from about 800 to 5,000 ppm of the detergent compositions herein will be provided in aqueous cleaning liquor.

The mean particle size of the components of granular compositions in accordance with the invention should preferably be such that no more that 5% of particles are greater than 1.7mm in diameter and not more than 5% of particles are less than 0.15mm in diameter.

The term mean particle size as defined herein is calculated by sieving a sample of the composition into a number of fractions (typically 5 fractions) on a series of Tyler sieves. The weight fractions thereby obtained are plotted against the aperture size of the sieves. The mean particle size is taken to be the aperture size through which 50% by weight of the sample would pass.

The granular laundry compositions in accordance with the present invention typically has a bulk density of from 100 g/litre to 1400 g/litre, more preferably from 300 g/litre to 1200 g/litre, from 650 g/litre to 1000 g/litre.

High Density Detergent Composition Processes

Various means and equipment are available to prepare high density (i.e., greater than about 550, preferably greater than about 650, grams/liter or "g/l"), high solubility, free-flowing, granular detergent compositions according to the present invention. Current commercial practice in the field employs spray-drying towers to manufacture granular laundry detergents which often have a density less than about 500 g/l. In this procedure, an aqueous slurry of various heat-stable ingredients in the final detergent composition are formed into homogeneous granules by passage through a spray-drying tower, using conventional techniques, at temperatures of about 175°C to about 225°C. However, if spray drying is used as part of the overall process herein, additional or alternative process steps as described hereinafter must be used to obtain the level of density (i.e., > 650 g/l) required by modern compact, low dosage detergent products.

For example, spray-dried granules from a tower can be densified further by loading a liquid such as water or a nonionic surfactant into the pores of the granules and/or subjecting them to one or more high speed mixer/densifiers. A suitable high speed mixer/densifier for this process is a device marketed under the tradename "Lödige CB 30" or "Lödige CB 30 Recycler" which comprises a static cylindrical mixing drum having a central rotating shaft with mixing/cutting blades mounted thereon. In use, the ingredients for the detergent composition are introduced into the drum and the shaft/blade assembly is rotated at speeds in the range of 100-2500 rpm to provide thorough mixing/densification. See Jacobs et al, U.S. Patent 5,149,455, issued September 22, 1992, and U.S. Patent 5,565,422, issued October 15, 1996 to Del Greco et al. Other such apparatus includes the devices marketed under the tradename "Shugi Granulator" and under the tradename "Drais K-TTP 80).

Another process step which can be used to densify further spray-dried granules involves treating the spray-dried granules in a moderate speed mixer/densifier. Equipment such as that marketed under the tradename "Lödige KM" (Series 300 or 600) or "Lödige Ploughshare" mixer/densifiers are suitable for this process step. Such equipment is typically operated at 40-160 rpm. The residence time of the detergent ingredients in the moderate speed mixer/densifier is from about 0.1 to 12 minutes conveniently measured by dividing the steady state mixer/densifier weight by the throughput (e.g., Kg/hr). Other useful equipment includes the device which is available under the tradename "Drais K-T 160". This process step which employs a moderate speed mixer/densifier (e.g. Lödige KM) can be used by itself or sequentially with the aforementioned high speed mixer/densifier (e.g. Lödige CB) to achieve the desired density. Other types of granules manufacturing apparatus useful herein include the apparatus disclosed in U.S. Patent 2,306,898, to G. L. Heller, December 29, 1942.

While it may be more suitable to use the high speed mixer/densifier followed by the low speed mixer/densifier, the reverse sequential mixer/densifier configuration also can be used. One or a combination of various parameters including residence times in the mixer/densifiers, operating temperatures of the equipment, temperature and/or composition of the granules, the use of adjunct ingredients such as liquid binders and flow aids, can be used to optimize densification of the spray-dried granules in the process of the invention. By way of example, see the processes in Appel et al, U.S. Patent 5,133,924, issued July 28, 1992; Delwel et al, U.S. Patent 4,637,891, issued January 20, 1987; Kruse et al, U.S. Patent 4,726,908, issued February 23, 1988; and, Bortolotti et al, U.S. Patent 5,160,657, issued November 3, 1992.

In those situations in which particularly heat sensitive or highly volatile detergent ingredients are to be incorporated into the final detergent composition, processes which do not include spray drying towers are preferred. The formulator can eliminate the spray-drying step by feeding, in either a continuous or batch mode, starting detergent ingredients directly into mixing equipment that is commercially available. One particularly preferred embodiment involves charging a surfactant paste and an anhydrous material into a high speed mixer/densifier (e.g. Lödige CB) followed by a moderate speed mixer/densifier (e.g. Lödige KM) to form high density detergent agglomerates. See Capeci et al, U.S. Patent 5,366,652, issued November 22, 1994 and Capeci et al, U.S. Patent 5,486,303, issued January 23, 1996. Optionally, the liquid/solids ratio of the starting detergent ingredients in such a process can be selected to obtain high density agglomerates that are more free flowing and crisp. See Capeci et al, U.S. Patent 5,565,137, issued October 15, 1996.

Optionally, the process may include one or more recycle streams of undersized particles produced by the process which are fed back to the mixer/densifiers for further agglomeration or build-up. The oversized particles produced by this process can be sent to grinding apparatus and then fed back to the mixing/densifying equipment. These additional recycle process steps facilitate build-up agglomeration of the starting detergent ingredients resulting in a finished composition having a uniform distribution of the desired particle size (400-700 microns) and density (> 550 g/l). See Capeci et al, U.S. Patent 5,516,448, issued May 14, 1996 and Capeci et al, U.S. Patent 5,489,392, issued February 6, 1996. Other suitable processes which do not call for the use of spray-drying towers are described by Bollier et al, U.S. Patent 4,828,721, issued May 9, 1989; Beerse et al, U.S. Patent 5,108,646, issued April 28, 1992; and, Jolicoeur, U.S. Patent 5,178,798, issued January 12, 1993.

In yet another embodiment, a high density detergent composition using a fluidized bed mixer. In this process, the various ingredients of the finished composition are combined in an

aqueous slurry (typically 80% solids content) and sprayed into a fluidized bed to provide the finished detergent granules. Prior to the fluidized bed, this process can optionally include the step of mixing the slurry using the aforementioned Lödige CB mixer/densifier or a "Flexomix 160" mixer/densifier, available from Shugi. Fluidized bed or moving beds of the type available under the tradename "Escher Wyss" can be used in such processes.

Another suitable process which can be used herein involves feeding a liquid acid precursor of an anionic surfactant, an alkaline inorganic material (e.g. sodium carbonate) and optionally other detergent ingredients into a high speed mixer/densifier so as to form particles containing a partially or totally neutralized anionic surfactant salt and the other starting detergent ingredients. Optionally, the contents in the high speed mixer/densifier can be sent to a moderate speed mixer/densifier (e.g. Lödige KM) for further mixing resulting in the finished high density detergent composition. See Appel et al, U.S. Patent 5,164,108, issued November 17, 1992.

Optionally, high density detergent compositions according to the invention can be produced by blending conventional or densified spray-dried detergent granules with detergent agglomerates in various proportions (e.g. a 60:40 weight ratio of granules to agglomerates) produced by one or a combination of the processes discussed herein. See U.S. Patent 5,569,645, issued October 29, 1996 to Dinniwell et al. Additional adjunct ingredients such as enzymes, perfumes, brighteners and the like can be sprayed or admixed with the agglomerates, granules or mixtures thereof produced by the processes discussed herein.

#### Laundry washing method

Machine laundry methods herein typically comprise treating soiled laundry with an aqueous wash solution in a washing machine having dissolved or dispensed therein an effective amount of a machine laundry detergent composition in accord with the invention. By an effective amount of the detergent composition it is here meant from 40g to 300g of product dissolved or dispersed in a wash solution of volume from 5 to 65 litres, as are typical product dosages and wash solution volumes commonly employed in conventional machine laundry methods.

As noted, surfactants are used herein in detergent compositions, preferably in combination with other deterative surfactants, at levels which are effective for achieving at least a directional improvement in cleaning performance. In the context of a fabric laundry composition, such "usage levels" can vary widely, depending not only on the type and severity of the soils and stains, but also on the wash water temperature, the volume of wash water and the type of washing machine.

#### Conventional Surface Cleansing Additive:

The hard surface cleaner composition of the present invention additionally contain a conventional surface cleansing additive. The conventional surface cleansing additive are present from about 0.001% to about 99.9% by weight. Preferably, conventional surface cleansing additive will be present from at least about 0.5%, more preferably, at least about 1%, even more preferably at least about 2%, by weight. Additionally, the conventional surface cleansing additives can also be present at least about 5%, at least about 8% and at least about 10%, by weight but it is more preferable that the conventional surface cleansing additive be present in at least about 2% by weight. Furthermore, the conventional surface cleansing additive will be preferably present in the hard surface composition at preferably at less than about 45%, more preferably less than about 40%, even more preferably less than about 35%, even more preferably less than about 30%, even more preferably less than about 20%, by weight. This conventional surface cleansing additive is selected from the group comprising liquid carrier, co-surfactant (preferably anionic; nonionic; cationic; amphoteric; zwitterionic; and mixtures thereof), builder, co-solvent, polymeric additive (preferably polyalkoxyethylene glycol; PVP homopolymers or copolymers thereof; polycarboxylate; sulfonated polystyrene polymer; and mixtures thereof), pH adjusting material, hydrotropes; and mixtures thereof. Examples of these suitable conventional surface cleansing additives can be found in US Pat App Nos. 60/061,970, Attorney docket No 6885P October 14, 1997, and 60/062,407, Attorney docket No 6886P October 14, 1997, both of which are incorporated herein by reference.

#### Packaging for the compositions

Commercially marketed executions of the compositions can be packaged in any suitable container including those constructed from paper, cardboard, plastic materials and any suitable laminates. A preferred packaging execution is described in European Application No. 94921505.7.

The compositions herein may be packaged in a variety of suitable detergent packaging known to those skilled in the art. The liquid compositions are preferably packaged in conventional detergent plastic bottles.

The following examples are illustrative of the present invention, but are not meant to limit or otherwise define its scope. All parts, percentages and ratios used herein are expressed as percent weight unless otherwise specified.

#### EXAMPLE 1

##### Preparation of C<sub>9/11</sub>EO<sub>8</sub>BO<sub>3</sub> Nonionic Surfactant

Neodol 91-8 (30.00 g, 58.7 mmol) is placed into a 250 ml three-necked round-bottomed flask, fitted with a heating mantle, magnetic stirrer, pressure equalizing dropping funnel, reflux

condenser, internal thermometer and argon inlet, and dried under vacuum at 75 °C. After releasing the vacuum with argon, sodium metal (0.03 g, 1.2 mmol) is placed into the flask and the mixture heated and stirred at 140 °C until all sodium is consumed. 1,2-Epoxybutane (12.71 g, 176.2 mmol) is then added dropwise at a rate so as to keep the reaction temperature at >120 °C, with a target of 140 °C. After all of the 1,2-epoxybutane is added and refluxing has ceased, the mixture is stirred and heated an additional 3 h at 140°C. The 140 °C mixture is then placed under vacuum for 15 min to remove any traces of 1,2-epoxybutane. A light brown liquid is isolated. NMR is consistent with the desired compound.

## EXAMPLE 2

### Preparation of $C_{9/11}EO_8C(CH_3)_2CH_2CH_3$ Nonionic Surfactant

Neodol 91-8 (30.00 g, 58.7 mmol) is placed into a 250 ml three-necked round-bottomed flask, fitted with a heating mantle, magnetic stirrer, internal thermometer and argon inlet, and dried under vacuum at 75°C. After cooling to ambient and releasing the vacuum with argon, methylene chloride (12ml) and 2-methyl-1-butene (4.53 g, 64.6 mmol) are added. Then boron trifluoride diethyl etherate (0.83 g, 5.9 mmol) is added all at once. This mixture is stirred 5 days at ambient. After adding 200 ml diethyl ether, the mixture is washed once with saturated sodium bicarbonate and once with brine. The ether layer is dried under magnesium sulfate and concentrated by rotary evaporation to leave a yellow liquid. NMR is consistent with the desired compound.

## EXAMPLE 3

### Preparation of $C_{9/11}EO_8(CH_2)_4CH_3$ Nonionic Surfactant

Anhydrous tetrahydrofuran (250 ml) and 60% sodium hydride (8.22 g, 205.6 mmol) are placed into a 500 ml three-necked round-bottomed flask, fitted with a magnetic stirrer, pressure equalizing dropping funnel, internal thermometer and argon inlet. After cooling the mixture to 0 °C, Neodol 91-8 (35.00 g, 68.5 mmol) is added dropwise over 10 minutes. After warming to ambient, the mixture is stirred for 2 h. 1-Iodopentane (33.93 g, 171.3 mmol) is added dropwise over 10 minutes. After stirring at ambient for 4 days, the mixture is quenched with alcohol, neutralized with concentrated HCl, diluted with 500 ml diethyl ether, and then extracted once with saturated  $NaHCO_3$  and once with brine. The ether layer is dried under magnesium sulfate and concentrated by rotary evaporation. This mixture is purified by flash chromatography (5:95 MeOH: $CH_2Cl_2$ ) to yield a gold liquid. NMR is consistent with the desired compound.

The following examples are illustrative of the present invention, but are not meant to limit or otherwise define its scope. All parts, percentages and ratios used herein are expressed as percent weight unless otherwise specified.

In the following Examples, the abbreviations for the various ingredients used for the compositions have the following meanings.

	LAS	Sodium linear C <sub>12</sub> alkyl benzene sulfonate
	MBAS <sub>x</sub>	Mid-chain branched primary alkyl (average total carbons = x) sulfate
	MBAE <sub>x</sub> S <sub>z</sub>	Mid-chain branched primary alkyl (average total carbons = z) ethoxylate (average EO = x) sulfate, sodium salt
10	MBAE <sub>x</sub>	Mid-chain branched primary alkyl (average total carbons = x) ethoxylate (average EO = 8)
	TFAA	C16-18 alkyl N-methyl glucamide
	CxyEzS	Sodium C <sub>1x</sub> -C <sub>1y</sub> branched alkyl sulfate condensed with z moles of ethylene oxide
15	CxyFA	C <sub>1x</sub> -C <sub>1y</sub> fatty acid
	CxyEz	A C <sub>1x-1y</sub> branched primary alcohol condensed with an average of z moles of ethylene oxide
	C24 N-Me Glucamide	C <sub>12</sub> -C <sub>14</sub> N-methyl glucamide
20	CxAPA	Alkyl amido propyl amine
	Citric acid	Anhydrous citric acid
	Carbonate	Anhydrous sodium carbonate with a particle size between 200µm and 900µm
	Citrate	Tri-sodium citrate dihydrate of activity 86.4% with a particle size distribution between 425µm and 850 µm
25	Protease	Proteolytic enzyme of activity 4KNPU/g sold by NOVO Industries A/S under the tradename Savinase
	Cellulase	Cellulytic enzyme of activity 1000 CEVU/g sold by NOVO Industries A/S under the tradename Carezyme
30	Amylase	Amylolytic enzyme of activity 60KNU/g sold by NOVO Industries A/S under the tradename Termamyl 60T
	Lipase	Lipolytic enzyme of activity 100kLU/g sold by NOVO Industries A/S under the tradename Lipolase



	Endolase	Endoglunase enzyme of activity 3000 CEVU/g sold by NOVO Industries A/S
	PB1	Anhydrous sodium perborate bleach of nominal formula $\text{NaBO}_2 \cdot \text{H}_2\text{O}_2$
	NOBS	Nonanoyloxybenzene sulfonate in the form of the sodium salt.
5	DTPMP	Diethylene triamine penta (methylene phosphonate), marketed by Monsanto under the Trade name Dequest 2060
	MEA	Monoethanolamine
	PG	Propanediol
	EtOH	Ethanol
10	Brightener 1	Disodium 4,4'-bis(2-sulphostyryl)biphenyl
	Brightener 2	Disodium 4,4'-bis(4-anilino-6-morpholino-1.3.5-triazin-2-yl)amino) stilbene-2:2'-disulfonate.
	Silicone antifoam	Polydimethylsiloxane foam controller with siloxane-oxyalkylene copolymer as dispersing agent with a ratio of said foam controller to said dispersing agent of 10:1 to 100:1.
15	NaOH	Solution of sodium hydroxide
	DTPA	Diethylene triamine pentaacetic acid
	NaTS	Sodium toluene sulfonic acid
	Fatty Acid (C12/14)	C12-C14 fatty acid
20	Fatty Acid (TPK)	Topped palm kernel fatty acid
	Fatty Acid (RPS)	Rapeseed fatty acid
	Borax	Na tetraborate decahydrate
	PAA	Polyacrylic Acid (mw = 4500)
	PEG	Polyethylene glycol (mw=4600)
25	MES	Alkyl methyl ester sulfonate
	SAS	Secondary alkyl sulfate
	NaPS	Sodium paraffin sulfonate
	C45AS	Sodium C <sub>14</sub> -C <sub>15</sub> linear alkyl sulfate
	CxyAS	Sodium C <sub>1x</sub> -C <sub>1y</sub> alkyl sulfate (or other salt if specified)
30	AQA	$\text{R}_2 \cdot \text{N}^+(\text{CH}_3)_x((\text{C}_2\text{H}_4\text{O})_y\text{H})_z$ with $\text{R}_2 = \text{C}_8 - \text{C}_{18}$ where $x+z=3$ , $x=0$ to 3, $z=0$ to 3, $y=1$ to 15.
	STPP	Anhydrous sodium tripolyphosphate

	Zeolite A	Hydrated Sodium Aluminosilicate of formula $\text{Na}_{12}(\text{Al}_{10}\text{SiO}_2)_{12} \cdot 27\text{H}_2\text{O}$ having a primary particle size in the range from 0.1 to 10 micrometers
	NaSKS-6	Crystalline layered silicate of formula $\delta\text{-Na}_2\text{Si}_2\text{O}_5$
5	Bicarbonate	Anhydrous sodium bicarbonate with a particle size distribution between 400 $\mu\text{m}$ and 1200 $\mu\text{m}$
	Silicate	Amorphous Sodium Silicate ( $\text{SiO}_2\text{:Na}_2\text{O}$ ; 2.0 ratio)
	Sulfate	Anhydrous sodium sulfate
	PAE	ethoxylated tetraethylene pentamine
10	PIE	ethoxylated polyethylene imine
	PAEC	methyl quaternized ethoxylated dihexylene triamine
	MA/AA	Copolymer of 1:4 maleic/acrylic acid, average molecular weight about 70,000.
	CMC	Sodium carboxymethyl cellulose
15	Protease	Proteolytic enzyme of activity 4KNPU/g sold by NOVO Industries A/S under the tradename Savinase
	Cellulase	Cellulytic enzyme of activity 1000 CEVU/g sold by NOVO Industries A/S under the tradename Carezyme
20	Amylase	Amylolytic enzyme of activity 60KNU/g sold by NOVO Industries A/S under the tradename Termamyl 60T
	Lipase	Lipolytic enzyme of activity 100kLU/g sold by NOVO Industries A/S under the tradename Lipolase
	Percarbonate	Sodium Percarbonate of nominal formula $2\text{Na}_2\text{CO}_3 \cdot 3\text{H}_2\text{O}_2$
	NaDCC	Sodium dichloroisocyanurate
25	TAED	Tetraacetythylenediamine
	DTPMP	Diethylene triamine penta (methylene phosphonate), marketed by Monsanto under Tradename Dequest 2060
	Photoactivated bleach	Sulfonated Zinc Phthalocyanine bleach encapsulated in dextrin soluble polymer
30	HEDP	1,1-hydroxyethane diphosphonic acid
	SRP 1	Sulfobenzoyl end capped esters with oxyethylene oxy and terephthaloyl backbone
	SRP 2	sulfonated ethoxylated terephthalate polymer

SRP 3	methyl capped ethoxylated terephthalate polymer
Isofol 16	Condea trademark for C16 (average) Guerbet alcohols
CaCl <sub>2</sub>	Calcium chloride
MgCl <sub>2</sub>	Magnesium chloride
5 DTPA	Diethylene triamine pentaacetic acid

#### **EXAMPLES 4 to 8: Nonaqueous Liquid Laundry Detergent compositions**

Non-limiting examples of bleach-containing nonaqueous liquid laundry detergent are prepared as follows.

#### **Preparation of LAS Powder for Use as a Structurant**

Sodium C<sub>12</sub> linear alkyl benzene sulfonate (NaLAS) is processed into a powder containing two phases. One of these phases is soluble in the non-aqueous liquid detergent compositions herein and the other phase is insoluble. It is the insoluble fraction which serves to add structure and particle suspending capability to the non-aqueous phase of the compositions herein.

NaLAS powder is produced by taking a slurry of NaLAS in water (approximately 40-50% active) combined with dissolved sodium sulfate (3-15%) and hydrotrope, sodium sulfosuccinate (1-3%). The hydrotrope and sulfate are used to improve the characteristics of the dry powder. A drum dryer is used to dry the slurry into a flake. When the NaLAS is dried with the sodium sulfate, two distinct phases are created within the flake. The insoluble phase creates a network structure of aggregate small particles (0.4-2 um) which allows the finished non-aqueous detergent product to stably suspend solids.

The NaLAS powder prepared according to this example has the following makeup shown in Table I.

**TABLE I**

**LAS Powder**

<u>Component</u>	<u>Wt. %</u>
NaLAS	85%
Sulfate	11%
Sulfosuccinate	2%
Water	2.5%
Unreacted, etc.	balance to 100%

% insoluble LAS	17%
# of phase (via X-ray diffraction)	2

Non-aqueous based heavy duty liquid laundry detergent compositions which comprise the capped nonionic surfactants of the present invention are presented below.

Component	4	5	6	7	8
LAS, From Example I	15	15	15	15	5
C12,13EO5BO1 or C9,11EO8BO1	21.5	15	10	5	25
C12,13EO5	-	6.5	11.5	16.5	6.5
BPP	19.5	19	19	19	19
Sodium citrate dihydrate	7	7	7	7	7
Bleach activator	6	6	6	6	6
Sodium carbonate	9	9	9	9	9
Maleic-acrylic copolymer	3	3	3	3	3
Colored speckles	0.4	0.4	0.4	0.4	0.4
EDDS	1	1	1	1	1
Cellulase Prills	0.1	0.1	0.1	0.1	0.1
Amylase Prills	0.4	0.4	0.4	0.4	0.4
Ethoxylated diamine quat	1.3	1.3	1.3	1.3	1.3
Sodium Perborate	12	12	12	12	12
Optionals including: brightener, colorant, perfume, thickener, suds suppressor, colored speckles etc.	balance	balance	balance	balance	balance
	100%	100%	100%	100%	100%

5

The resulting compositions are stable, anhydrous heavy-duty liquid laundry detergents which provide excellent rates of mixing with water as well as good stain and soil removal performance when used in normal fabric laundering operations.

**EXAMPLE 9: Hand Dishwashing Liquid compositions**

The following Examples further illustrates the invention herein with respect to a hand dishwashing liquid.

**Example 19:**

	<u>Ingredient</u>	<u>% (wt.)</u>	<u>Range (% wt.)</u>
5	C <sub>9,11</sub> EO <sub>8</sub> BO <sub>1</sub>	5.0	1 - 20
	MBAE <sub>2</sub> S <sub>15</sub>	2.0	0.5-10
	Ammonium C <sub>12-13</sub> alkyl sulfate	7.0	2-35
	C <sub>12</sub> -C <sub>14</sub> ethoxy (1) sulfate	20.5	5-35
10	Coconut amine oxide	2.6	2-5
	Betaine/Tetronic 704®**	0.87-0.10	0-2 (mix)
	Alcohol Ethoxylate C <sub>9-11</sub> E <sub>9</sub>	1.0	0.5-10
	Ammonium xylene sulfonate	4.0	1-6
	Ethanol	4.0	0-7
15	Ammonium citrate	0.06	0-1.0
	Magnesium chloride	3.3	0-4.0
	Calcium chloride	2.5	0-4.0
	Ammonium sulfate	0.08	0-4.0
	Perfume	0.18	0-0.5
20	Maxatase® protease	0.50	0-1.0
	Water and minors	-----Balance-----	

\*\* Cocoalkyl betaine.

**EXAMPLES 10 to 14: Shampoo compositions**

		<u>Example Number</u>				
	<u>Component</u>	<u>10</u>	<u>11</u>	<u>12</u>	<u>13</u>	<u>14</u>
25	Ammonium laureth-2 sulfate	5	3	2	10	8
	Ammonium lauryl sulfate	5	5	4	5	8
	C <sub>9,11</sub> EO <sub>8</sub> BO <sub>1</sub>	2	3	4	5	7
	Cocamide MEA	0	0.68	0.68	0.8	0
30	PEG 14M	0.1	0.35	0.5	0.1	0
	Cocoamidopropylbetaine	2.5	2.5	0	0	1.5
	Cetylalcohol	0.42	0.42	0.42	0.5	0.5
	Stearylalcohol	0.18	0.18	0.18	0.2	0.18
	Ethylene glycol distearate	1.5	1.5	1.5	1.5	1.5

Dimethicone <sup>1</sup>	1.75	1.75	1.75	1.75	2.0
Perfume solution	0.45	0.45	0.45	0.45	0.45
DMDM hydantoin	0.37	0.37	0.37	0.37	0.37
Color solution (ppm)	64	64	64	64	64
5 Water and minors	----- q. s. to 100% -----				

1. Dimethicone is a 40(gum)/60(fluid) weight ratio blend of SE-76 dimethicone gum available from General Electric Silicones Division and a dimethicone fluid having a viscosity of 350 centistokes.

10

#### **EXAMPLES 15 to 30: Granular Laundry Detergents**

The following laundry detergent compositions are prepared in accord with the invention:

	15	16	17	18	19	20
MBAS <sub>14.4</sub>	8.0	4.0	4.0	8.0	4.0	4.0
C45AS	-	4.0	2.8	-	4.0	2.8
LAS	-	-	1.2	-	-	1.2
C12,13EO5BO1	3.4	3.4	3.4	3.4	3.4	3.4
AQA	0.4	0.5	0.6	0.8	0.8	0.8
Zeolite A	18.1	18.1	18.1	18.1	18.1	18.1
Carbonate	13.0	13.0	13.0	27.0	27.0	27.0
Silicate	1.4	1.4	1.4	3.0	3.0	3.0
Sulfate	26.1	26.1	26.1	26.1	26.1	26.1
PB4	9.0	9.0	9.0	9.0	9.0	9.0
TAED	1.5	1.5	1.5	1.5	1.5	1.5
DTPMP	0.25	0.25	0.25	0.25	0.25	0.25
HEDP	0.3	0.3	0.3	0.3	0.3	0.3
Protease	0.26	0.26	0.26	0.26	0.26	0.26
Amylase	0.1	0.1	0.1	0.1	0.1	0.1
MA/AA	0.3	0.3	0.3	0.3	0.3	0.3
CMC	0.2	0.2	0.2	0.2	0.2	0.2
Photoactivated bleach	15 ppm	15 ppm	15 ppm	15 ppm	15 ppm	15 ppm
Brightener 1	0.09	0.09	0.09	0.09	0.09	0.09

Perfume	0.3	0.3	0.3	0.3	0.3	0.3
Silicone antifoam	0.5	0.5	0.5	0.5	0.5	0.5
Misc/minors to 100%						
Density in g/litre	850	850	850	850	850	850

The following laundry detergent compositions are prepared in accord with the invention:

	21	22	23	24	25
MBAS14.4	22	16.5	11	1 - 5.5	10 - 25
Any Combination of: C45 AS C45E1S LAS C16 SAS C14-17 NaPS C14-18 MES MBAE2S14.3	0	1 - 5.5	11	16.5	0 - 5
AQA	2	2	2	2	0.5 - 4
C12,13E6.5BO1	1.5	1.5	1.5	1.5	1 - 4
Zeolite A	27.8	27.8	27.8	27.8	20 - 30
PAA	2.3	2.3	2.3	2.3	0 - 5
Carbonate	27.3	27.3	27.3	27.3	20 - 30
Silicate	0.6	0.6	0.6	0.6	0 - 2
PB1	1.0	1.0	1.0	1.0	0 - 3
Protease	0 - 0.5	0 - 0.5	0 - 0.5	0 - 0.5	0 - 0.5
Cellulase	0 - 0.3	0 - 0.3	0 - 0.3	0 - 0.3	0 - 0.5
Amylase	0 - 0.5	0 - 0.5	0 - 0.5	0 - 0.5	0 - 1
SRP 1	0.4	0.4	0.4	0.4	0 - 1
Brightener 1 or 2	0.2	0.2	0.2	0.2	0 - 0.3
PEG	1.6	1.6	1.6	1.6	0 - 2
Sulfate	5.5	5.5	5.5	5.5	0 - 6
Silicone Antifoam	0.42	0.42	0.42	0.42	0 - 0.5
Moisture & Minors	---Balance---				

Density (g/L)	663	663	663	663	600 - 700
---------------	-----	-----	-----	-----	-----------

The following laundry detergent compositions are prepared in accord with the invention:

	26	27	28	29	30
MBAS14.4	16.5	12.5	8.5	4	1 - 25
Any Combination of: C45 AS C45E1S LAS C16 SAS C14-17 NaPS C14-18 MES MBAE2S14.3	0 - 6	10	14	18.5	0 - 20
AQA	2	2	2	2	1 - 4
TFAA	1.6	1.6	1.6	1.6	0 - 4
C12,14EO4BO1	5	5	5	5	1 - 6
Zeolite A	15	15	15	15	10 - 30
NaSKS-6	11	11	11	11	5 - 15
Citrate	3	3	3	3	0 - 8
MA/AA	4.8	4.8	4.8	4.8	0 - 8
HEDP	0.5	0.5	0.5	0.5	0 - 1
Carbonate	8.5	8.5	8.5	8.5	0 - 15
Percarbonate or PB1	20.7	20.7	20.7	20.7	0 - 25
TAED	4.8	4.8	4.8	4.8	0 - 8
Protease	0.9	0.9	0.9	0.9	0 - 1
Lipase	0.15	0.15	0.15	0.15	0 - 0.3
Cellulase	0.26	0.26	0.26	0.26	0 - 0.5
Amylase	0.36	0.36	0.36	0.36	0 - 0.5
SRP 1	0.2	0.2	0.2	0.2	0 - 0.5
Brightener 1 or 2	0.2	0.2	0.2	0.2	0 - 0.4
Sulfate	2.3	2.3	2.3	2.3	0 - 25



Silicone Antifoam		0.4	0.4	0.4	0 - 1
Moisture & Minors	---Balance---				
Density (g/L)	850	850		850	850

### **EXAMPLES 31 to 38: Hard Surface Cleaners**

The following compositions were made by mixing the listed ingredients in the listed proportions.

These compositions were used neat to clean marble and dilute to clean lacquered wooden floors.

- 5 Excellent cleaning and surface safety performance was observed.

[illegible]

## WHAT IS CLAIMED IS:

## 1. A granular laundry composition comprising:

- a) a capped nonionic surfactant with an X/Y number greater than 1.00;
- b) a conventional detergent additive; and
- c) a co-surfactant;

wherein the composition is in the form of a granule with a bulk density of from 100 g/l to 1400 g/l.

## 2. A nonaqueous heavy duty liquid laundry detergent composition in the form of a stable suspension of solid, substantially insoluble particulate material dispersed throughout a structured, surfactant-containing liquid phase, wherein said composition comprises:

from 55% to 98.9% by weight of said composition of a structured, surfactant-containing liquid phase formed by combining:

- i) from 1% to 80% by weight of said liquid phase of one or more nonaqueous organic diluents; and
- ii) from 20% to 99% by weight of said liquid phase of a surfactant system comprising surfactants selected from the group consisting of anionic, nonionic, cationic surfactants and combinations thereof;

wherein said surfactant system comprises at least 10%, by weight of a capped nonionic surfactant with an X/Y number greater than 1.00.

## 3. An aqueous heavy duty liquid laundry detergent composition comprising:

- a) a capped nonionic surfactant with an X/Y number greater than 1.00;
- b) a conventional detergent additive; and
- c) an aqueous liquid carrier.

## 4. A light duty liquid detergent composition comprising:

- a) a capped nonionic surfactant with an X/Y number greater than 1.00;
- b) a conventional detergent additive;
- c) a co-surfactant;

wherein the composition is in the form of a liquid, gel, or liqui-gel and the pH (as measured as 10% aqueous solution) is from 5.0 to 12.5.

## 5. A shampoo, or personal cleansing composition comprising:

- a) a capped nonionic surfactant with an X/Y number greater than 1.00;
- b) a co-surfactant;

c) a shampoo composition adjunct ingredient;  
wherein said composition is in the form of a liquid, gel or liqui-gel.

6. A hard surface cleansing composition comprising:

- 5       a) a capped nonionic surfactant with an X/Y number greater than 1.00;  
      b) a co-surfactant;  
      c) a surface cleanser adjunct ingredient;

wherein said composition is in the form of a liquid, gel or liqui-gel.

10   7. The composition according to any one of Claims 1 to 6 wherein said capped nonionic  
      surfactant is selected from the group consisting of C<sub>9</sub>,<sub>11</sub>PO<sub>3</sub>EO<sub>13</sub>PO<sub>15</sub>;  
      C<sub>9</sub>,<sub>11</sub>PO<sub>3</sub>EO<sub>13</sub>BO<sub>6</sub>; C<sub>9</sub>,<sub>11</sub>PO<sub>3</sub>EO<sub>13</sub>BO<sub>3</sub>; C<sub>9</sub>,<sub>11</sub>EO<sub>13</sub>BO<sub>6</sub>; C<sub>9</sub>,<sub>11</sub>EO<sub>13</sub>BO<sub>3</sub>;  
      C<sub>9</sub>,<sub>11</sub>BO<sub>1</sub>EO<sub>13</sub>BO<sub>3</sub>; C<sub>9</sub>,<sub>11</sub>EO<sub>8</sub>BO<sub>3</sub>; C<sub>12</sub>,<sub>15</sub>EO<sub>7</sub>BO<sub>2</sub>; C<sub>9</sub>,<sub>11</sub>EO<sub>8</sub>BO<sub>2</sub>; C<sub>9</sub>,<sub>11</sub>EO<sub>8</sub>BO<sub>1</sub>;  
15       C<sub>12</sub>,<sub>13</sub>EO<sub>6.5</sub>TBO<sub>1</sub>; C<sub>9</sub>,<sub>11</sub>EO<sub>8</sub>C(CH<sub>3</sub>)<sub>2</sub>CH<sub>2</sub>CH<sub>3</sub>; C<sub>11</sub>/<sub>15</sub>EO<sub>15</sub>PO<sub>6</sub>C<sub>12</sub>/<sub>14</sub>;  
      C<sub>9</sub>,<sub>11</sub>EO<sub>8</sub>(CH<sub>2</sub>)<sub>4</sub>CH<sub>3</sub>; and mixtures thereof.

20   8. The composition according to any one of Claims 1 to 6 wherein said capped nonionic  
      surfactant is selected from the group of compounds including mixtures of compounds  
      described by C<sub>x</sub>EO<sub>y</sub>BO<sub>z</sub>, wherein x is 8 to 16, y is 4 to 14, z is less than or equal to 2, and  
      X/Y No. is greater than 1.

25   9. The detergent composition according to any one of Claims 1-8 further comprising  
      one or more deterative adjuncts selected from the following: soil release polymers, polymeric  
      dispersants, polysaccharides, abrasives, bactericides, tarnish inhibitors, builders, enzymes, dyes,  
      perfumes, thickeners, antioxidants, processing aids, suds boosters, buffers, antifungal or mildew  
      control agents, insect repellants, anti-corrosive aids, and chelants.

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In the U.S. National Phase Entry  
Under 35 USC 371 from  
International Application of  
SCHEPER, William Michael et al.  
Int'l. Application No. PCT/US00/04185  
Filed in the RO/US on 18 February 2000  
Entitled: *Cleaning Compositions Containing  
Selected Nonionic Surfactants*

ASSOCIATE POWER OF ATTORNEY

Assistant Commissioner for Patents  
Box PCT  
Washington, D.C. 20231

Dear Sir:


You are requested to recognize K. W. Zerby (Registration No. 32,323), J. V. Bamber (Registration No. 31,148), J. J. Camp (Registration No. 44,582), B. M. Bolam (Registration No. 37,513) and K. L. Waugh (Registration No. 47,206) of The Procter & Gamble Company, Cincinnati, Ohio, as Associate Attorneys to prosecute this application, to make alterations and amendments therein, and to transact all business in the Patent Office connected with the application or with the patent granted thereupon.

Please address all future communications to:

K. L. Waugh, Patent Attorney  
Customer Number 27748

Respectfully submitted for Applicants,

By

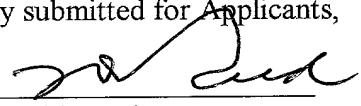  
T. David Reed  
Agent for Applicant  
Registration No. 32,931

Cincinnati, Ohio  
10 August 2001  
(513) 627-7025/FAX 627-6333

## DECLARATION COMBINED WITH POWER OF ATTORNEY

Page 1 of 2  
Attorney Docket No. 7442

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled CLEANING COMPOSITIONS CONTAINING SELECTED NONIONIC SURFACTANTS the specification of which

(check ☐ is attached hereto.  
one) ☒ was filed on February 18, 2000 as United States Application No. or  
PCT International Application Serial No. PCT/US00/04185  
and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations §1.56.

I hereby claim foreign priority benefits under Title 35 United States Code §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)Priority Claimed

(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
60/121,171		02/22/99		

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

Application Serial No.	Filing Date	Application Serial No.	Filing Date
60/121,171	02/22/99		

I hereby claim the benefit under Title 35 United States Code §120 of any United States application(s), or §365(c) of any PCT International application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35 United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

U.S. Parent Application Number	PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (If applicable)
--------------------------------	-------------------	---------------------------------	--------------------------------------

As named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Atty Name	Atty Reg Number	of Attorney Attached	
Kim William Zerby	32,323	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Jacobus C. Rasser	37,043	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
T. David Reed	32,931	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Timothy B. Guffey	41,048	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Brian M. Bolam	37,513	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
C. Brant Cook	39,151	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Richard S. Echler, Sr.	41,006	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Ian S. Robinson	43,348	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No

SEND CORRESPONDENCE TO:

Kim William Zerby

The Procter &amp; Gamble Company

(513) 627-2885

Name

Phone No.

Miami Valley Laboratories, P. O. Box 538707, Cincinnati, OH 45253-8707

Street

City

State

Zip Code

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1-00  
Full name of sole or first joint inventor William Michael Scheper  
Inventor's signature William Michael Scheper Date 3-13-00  
Residence 2393 Picnic Woods Drive, Lawrenceburg, IN 47025  
Citizenship USA  
Post Office Address The Procter & Gamble Company, Miami Valley Laboratories  
P.O. Box 538707, Cincinnati, OH 45253-8707

2-00  
Full name of second joint inventor, if any Bernard William Kluesener  
Inventor's signature Bernard William Kluesener Date 3-13-00  
Residence 11619 New Biddinger Road, Harrison, OH 45030  
Citizenship USA  
Post Office Address The Procter & Gamble Company, Miami Valley Laboratories  
P.O. Box 538707, Cincinnati, OH 45253-8707

3-00  
Full name of third joint inventor, if any Mark Robert Sivik  
Inventor's signature Mark Robert Sivik Date March 14, 2000  
Residence 2434 Sheffield Court, Ft. Mitchell, KY 41017  
Citizenship USA  
Post Office Address The Procter & Gamble Company, Miami Valley Laboratories  
P.O. Box 538707, Cincinnati, OH 45253-8707

4-00  
Full name of fourth joint inventor, if any Glenn Thomas Jordan IV  
Inventor's signature Glenn T. Jordan, IV Date 3/21/00  
Residence 5750 Ridgeview Drive, Indian Springs, OH 45011  
Citizenship USA  
Post Office Address The Procter & Gamble Company, Miami Valley Laboratories  
P.O. Box 538707, Cincinnati, OH 45253-8707

5-00  
Full name of fifth joint inventor, if any Phillip Kyle Vinson  
Inventor's signature Phillip Kyle Vinson Date 3/13/00  
Residence 5803 Windermere Lane, Fairfield, OH 45014  
Citizenship USA  
Post Office Address The Procter & Gamble Company, Miami Valley Laboratories  
P.O. Box 538707, Cincinnati, OH 45253-8707